




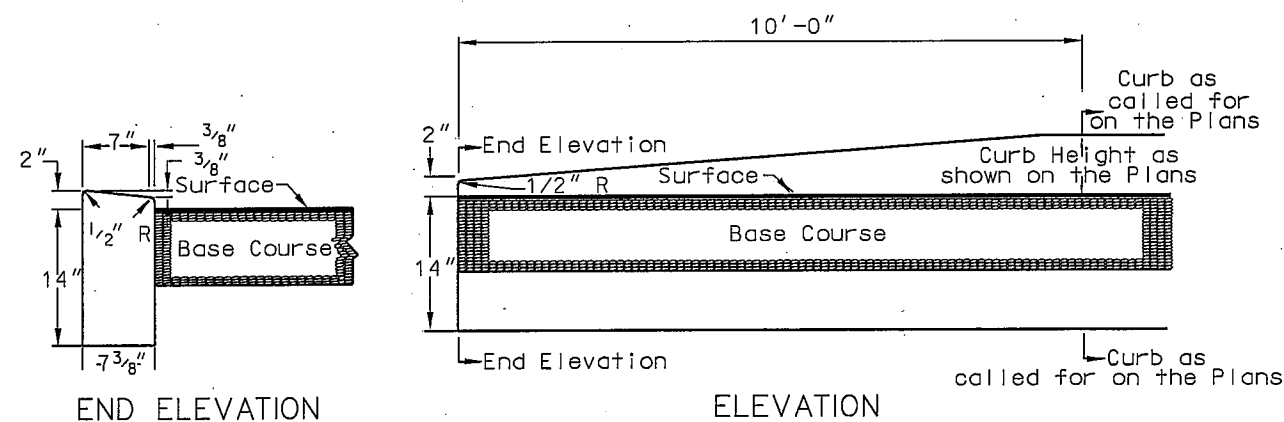


STANDARD CURB TAPER
CLASS I

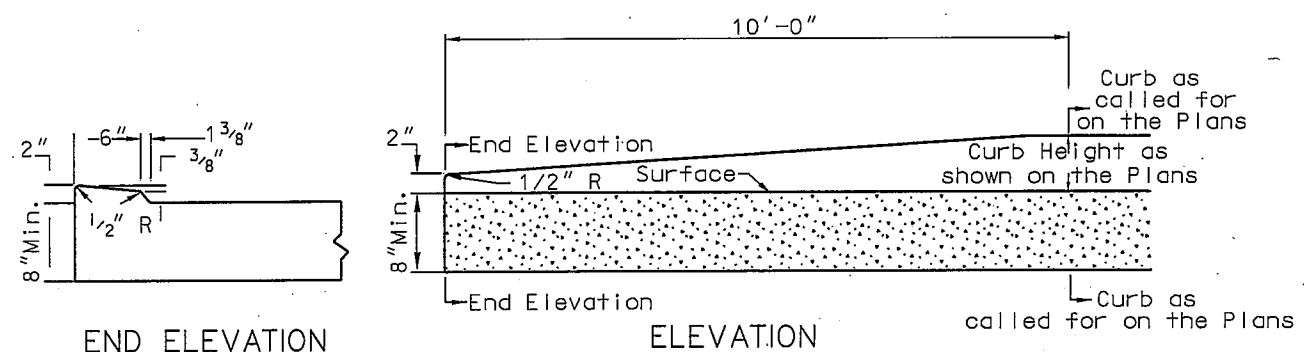


STANDARD CURB TAPER
CLASS II

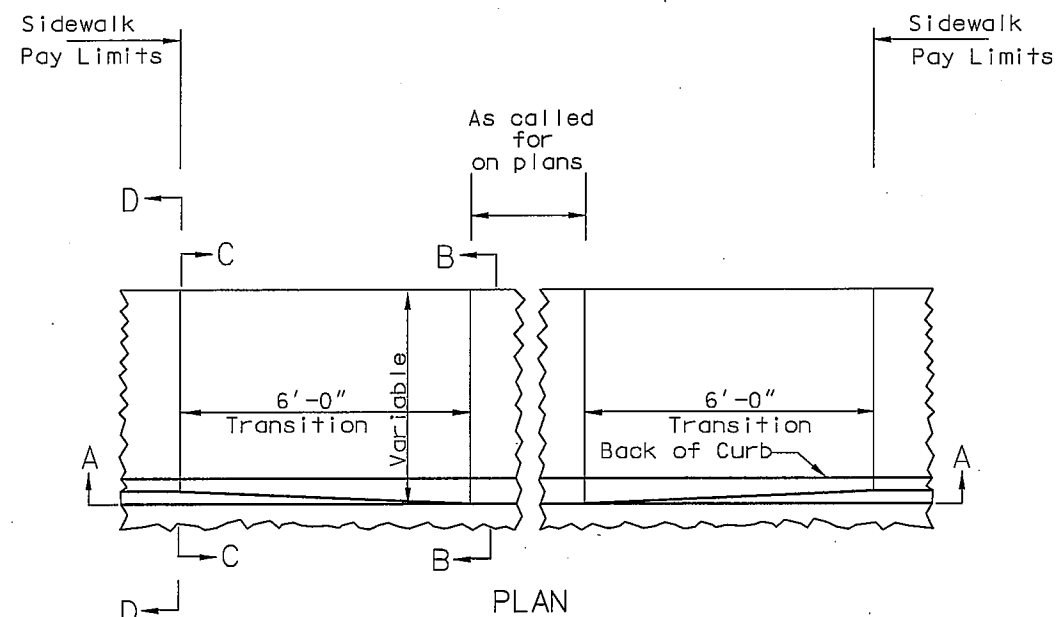

PLAN

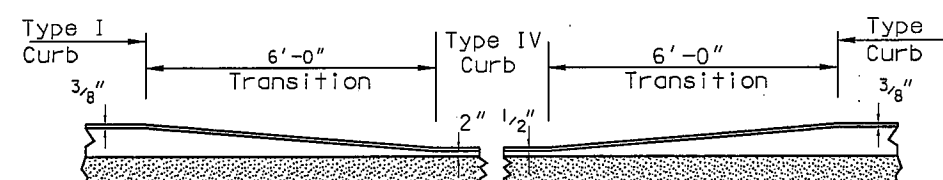


SECTION A-A

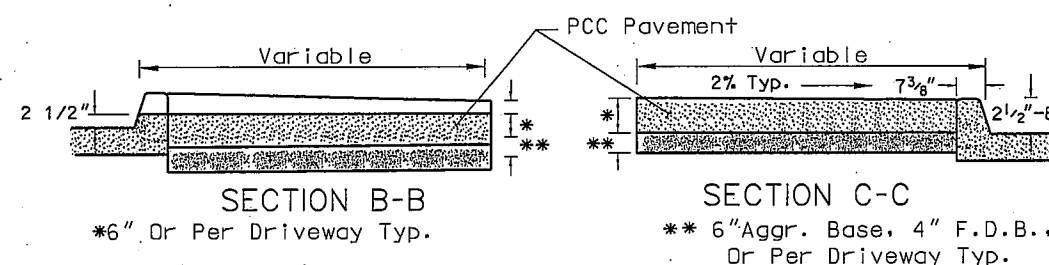

SECTION B-B

SECTION C-C

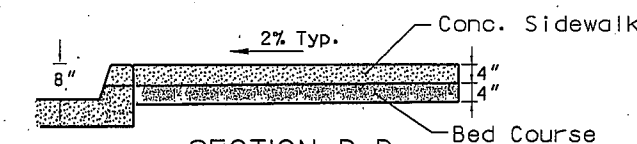

SECTION D-D

SIDEWALK AND CURB
TREATMENT AT DRIVEWAYS

NOTES

The Standard Curb Taper, Class I, shall be used at the ends of all Plain Concrete Curbing, unless otherwise called for on the Plans.

The Standard Curb Taper, Class II, shall be used at the ends of all Combination Curb and Gutter, and all Integral Concrete Curbing, unless otherwise called for on the Plans.

The details as shown for Sidewalk and Curb Treatment at Driveways are to be utilized unless otherwise called for on the Plans.

Section A-A details a 6' transition length in the height of the curb where driveways and Type IV curbing are encountered.

Section B-B & C-C details additional depth of sidewalk at driveways and section D-D details standard depth sidewalk.

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
STANDARD DETAIL

REVISED STANDARD DETAIL

PREPARED 7-1-99
REVISION DATE
7-15-2010

CONCRETE CURBING
AND
SIDEWALK
(sheet 2 of 2)

SHEET PVT 6