


**WEST VIRGINIA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS**

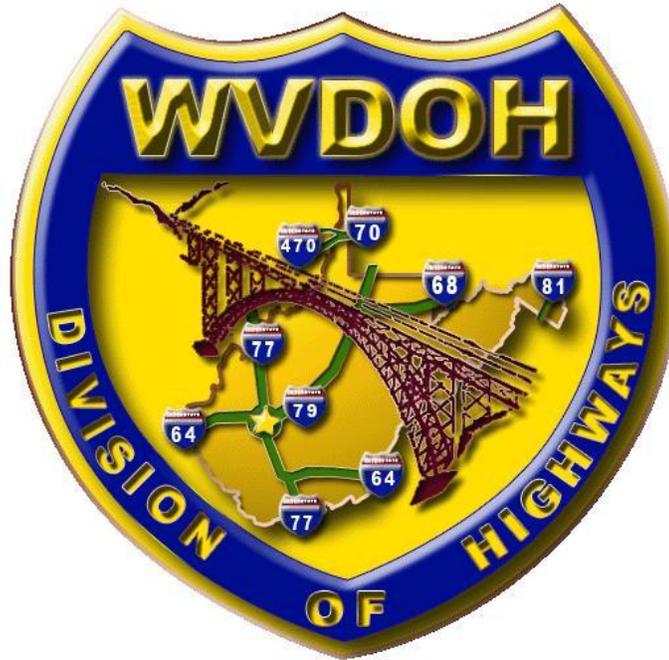

**SUPPLEMENTAL
SPECIFICATIONS**

**TO ACCOMPANY THE 2010 EDITION OF
THE STANDARD SPECIFICATIONS
Roads and Bridges**

ISSUED JANUARY 1, 2012

TABLE OF CONTENTS

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
<u>DIVISION 100</u>		
107	LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC	1
	107.1 Laws To Be Observed	1
	107.2 Permits, Licenses, and Taxes	1
	107.14 Responsibility For Damage Claims	1
	107.21 Protection of Rivers, Streams, and Impoundments	2
	107.21.1 Erosion and Sedimentation Control	2
108	PROSECUTION AND PROGRESS	4
	108.3.1 General	4
	108.6.2 Extension of Contract Time	5
109	MEASUREMENT AND PAYMENT	5
	109.9 Price Adjustment of Fuels	5
	109.10 Price Adjustment of Asphalt Binder	6
<u>DIVISION 200</u>		
203	DISMANTLING STRUCTURES	11
	203.1 Description	11
	203.3 Construction Methods	11
207	EXCAVATION AND EMBANKMENT	11
	207.6.5 Construction/Demolition Waste Material	11
	207.9 Subgrade	13
	207.9.1 Tolerance	13
211	BORROW EXCAVATION	14
	211.2 Materials	14
	211.2.4 Impervious Core	14
	211.3 General	14
	211.3.1 Borrow Within WVDOH R/W Limits	14
	211.3.2 Borrow Outside WVDOH R/W Limits	15
	211.3.3 Impervious Core	16
	211.5 Rock Borrow Excavation	17
218	SLOPE AND FOUNDATION PROTECTION	17
	218.4.1 Scour Protection	17
	218.7 Pay Items	17

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
<u>DIVISION 300</u>		
311	OPEN GRADED FREE DRAINING BASE COURSE	19
	318.2 Materials	19
	311.4 Composition of Optional Stabilizing Mixtures	19
	311.11 Curing	19
<u>DIVISION 400</u>		
401	ASPHALT BASE, WEARING, AND PATCHING AND LEVELING COURSES	21
	401.7 Acceptance Testing	21
	401.7.3 Compaction	21
	401.10 Paving Operations	22
	401.10.5 Joints	22
	401.13 Basis Of Payment	23
	401.14 Pay Items	24
402	ASPHALT SKID RESISTANT PAVEMENT	26
	402.5 Pay Items	26
<u>DIVISION 500</u>		
501	UNBONDED CONCRETE OVERLAY	29
	501.1 Description	29
	501.4 Testing	29
	501.4.5 Compressive Strength Tests for Acceptance	29
	501.6 Preparation of Grade, Setting Forms, and Conditioning of Subgrade or Base	29
	501.6.3.1 Conditioning of Surfaces Receiving an Unbonded Concrete Overlay	29
	501.9 Placing Concrete	30
	501.11 Joints	30
	501.11.1 Longitudinal Joints	32
	501.11.2 Transverse Expansion Joints (Type B or Type C Joint)	32
	501.11.3 Transverse Contraction Joint	33
	501.11.4 Transverse Construction Joints	33
	501.11.5 Coated Dowel Bars	33
	501.11.6 Expansion Joints Around Structures	35
	501.11.7 Random Cracks	35
	501.11.9 Transverse Joints in Concrete Shoulders	35
	501.14 Curing	35
	501.14.4 White Pigmented Impervious Membrane	35

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
	501.16 Sealing Joints	35
	501.22 Method of Measurement	35
	501.23 Basis of Payment	36
	501.23.1 General	36
	501.24 Pay Items	36
506	CONCRETE PAVEMENT REPAIR	37
	506.1 Description	37
	506.2 Materials	37
	506.3 Proportioning	38
	506.4 Testing	38
	506.5 Equipment and Tools	38
	506.6 Construction Methods	38
	506.6.2 Conditioning Existing Subbase	39
	506.6.3 Placing Concrete	39
	506.6.4 Straighedge Checking and Surface Correction	39
	506.6.5 Curing	40
	506.6.6 Sealing Joints	40
	506.6.7 Repair of Adjacent Shoulders	40
	506.6.8 Specific Construction Methods	40
	506.6.8.1 Type I Repairs	40
	506.6.8.2 Type II Repairs	41
	506.7 Ride Acceptance	41
	506.8 Method of Measurement	42
	506.9 Basis of Payment	42
	506.10 Pay Items	42
514	ROLLER COMPACTED CONCRETE	42
	514.1 Description	42
	514.2 Materials	42
	514.2.1 Material Requirements	43
	514.3 Proportioning	44
	514.3.1 RCC Mix Design Requirements	44
	514.3.2 Design Compressive Strength	44
	514.4 Testing	44
	501.4.1 Compressive Strength Tests for Acceptance	44
	514.5 Equipment and Tools	45
	514.5.1 Field Laboratory	45
	514.5.2 Mixing Plant	45
	514.5.2.1 General	45
	514.5.2.2 Pugmill Plant	45
	514.5.2.2.1 Aggregate Storage	45
	514.5.2.2.2 Aggregate Feed Rate	46
	514.5.2.2.3 Plant Scales	46
	514.5.2.2.4 Cement and Pozzolan Material Storage	46

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
514.5.2.2.5	Portland Cement and Pozzolan	46
514.5.2.2.6	Cement and Pozzolan Feed Unit	46
514.5.2.2.7	Water Control Unit	46
514.5.2.2.8	Gob Hopper	46
514.5.2.3	Rotary Drum Mixer	46
514.5.2.3.1	Weighing Equipment	47
514.5.2.3.2	Weigh Hoppers	47
514.5.2.3.3	Water Metering	47
514.5.2.3.4	Mixing Time	47
514.5.2.3.5	Recharging	47
514.5.3	Paver	47
514.5.4	Compactors	47
514.5.5	Haul Trucks	48
514.5.6	Water Trucks	48
514.5.7	Inspection of Equipment	48
514.5.8	Access for Inspection and Calibration	48
514.6	Preparation of Grade and Conditioning of Subgrade or Base	48
514.7	Handling, Measuring, and Batching Materials	48
514.8	Mixing RCC	48
514.8.1	Mixing Process	48
514.8.2	Mixing Time	49
514.8.3	Plant Calibration	49
514.8.4	Daily Reports	49
514.8.5	Transportation	49
514.9	Placing RCC	49
514.9.1	Subbase Condition	49
514.9.2	Adverse Weather Conditions	49
514.9.2.1	Cold Weather Precautions	49
514.9.2.2	Hot Weather Precautions	49
514.9.2.3	Rain Limitations	50
514.9.3	Paver Requirements	50
514.9.3.1	Filling the Paver	50
514.9.3.2	Stopping the Paver	50
514.9.3.3	Surface Conditions	50
514.9.4	Inaccessible Areas	50
514.9.5	Adjacent Lane Pavement	50
514.9.6	Hand Spreading	50
514.9.7	Segregation	51
514.10	Compaction	51
514.10.1	Time to Compaction Start	51
514.10.2	Rolling	51
514.10.3	Rolling Longitudinal and Transverse Joints	51

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
514.10.4	Inaccessible Areas	51
514.10.5	Density Requirements	51
514.11	Joints	52
514.11.1	Fresh Vertical Joints	52
514.11.2	Cold Vertical Joints	52
514.11.2.1	Sawing Cold Vertical Joints	52
514.11.3	RCC Pavement Joints at Structures	52
514.11.4	Control Joints	52
514.12	Finishing	53
514.13	Curing	53
514.13.1	Water Cure	53
514.13.2	Curing Compound	53
514.14	Opening to Traffic	53
514.15	Maintenance	54
514.16	Thickness	54
514.16.1	Tolerance in Pavement Thickness	54
514.17	Method of Measurement	54
514.18	Basis of Payment	54
514.19	Pay Items	54

DIVISION 600

601	STRUCTURAL CONCRETE	55
	601.3.2.3 Yield	55
	601.3.2.4 Total Solids \bar{A}	55
	601.4 Testing	55
	601.4.1 Sampling and Testing Methods	
	601.4.2 Contractor's Quality Control	55
	601.4.5 Tests for permeability acceptance of Class H Concrete	56
	601.10.1.1 Pre-Pour Meeting	56
	601.10.1.2 Concrete Placement Limitations	56
	601.10.1.3 Concrete Placement at Night	56
	601.12.4 Curing Class H Concrete	57
602	REINFORCING STEEL	57
	602.6.1 General	57
	602.7.1 Lapping	57
603.15	PAY ITEMS	58
610	PLAIN CONCRETE CURBING, INTEGRAL CONCRETE CURBING, AND COMBINATION CONCRETE CURB AND GUTTER	58
	610.3.4 Sections	58

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
626	RETAINING WALL SYSTEMS	59
	626.5 Materials	59
	626.5.1.1.2.3 Sealers	59
633	CONCRETE GUTTER, INVERT PIPE GUTTER, OR DUMPED ROCK GUTTER	59
	633.2 Materials	59
	633.6 Dumped Rock Gutter	59
	633.6.1 Grout for Dumped Rock Gutter	59
	633.7 Method of Measurement	60
	633.9 Pay Items	60
636	MAINTAINING TRAFFIC	60
	636.5 Temporary Structures	60
	636.12 Temporary Impact Attenuating Device	60
	636.14 Temporary Barrier	61
	636.14.1 Materials	61
	636.14.2 Installation	62
	636.15 Removing and Resetting Temporary Barriers	63
	636.23 Method of Measurement	63
	636.23.4 Temporary Structures	63
	636.23.17 Temporary Barrier	63
	636.23.18 Removing and Resetting Temporary Barrier	64
	636.23.27 Temporary Impact Attenuating Device	64
	636.23.28 Remove and Reset Attenuator Device	64
	636.25 Pay Items	64
638	PROJECT MARKERS, RIGHT-OF-WAY MARKERS, SURVEY MARKERS, AND OUTLET MARKERS	65
	638.1 Description	65
	638.2 Materials	65
	638.6 Outlet Markers	66
	638.6.1 General	66
	638.6.2 Location and Content	66
	638.6.3 Installation	67
	638.7 Method of Measurement	67
	638.8 Basis of Payment	67
657	ROADSIDE SIGN SUPPORTS	67
	657.2 Materials	67
	657.2.5 U-Channel Breakaway Mounting Device	67
	657.4.2 Setting Posts	67
	657.5.12 U-Channel Breakaway Mounting Device	68
660	TRAFFIC SIGNALS	68
	660.9 Loop Traffic Detectors	68
	660.15 Junction Boxes	68
	660.21 Pay Items	69

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
661	TRAFFIC SIGNS AND DELINEATORS	69
	661.3.7.1 Flat Sheet	69
	661.17 Pay Items	69
662	ROADWAY LIGHTING	70
	662.14 Testing	70
664	TRAFFIC SAFETY DEVICES RUBLE STRIPS	70
	664.3 Construction Methods	70
	664.3.2 Rumble Strips	71
	664.3.2.1 Rumble Strip Equipment	71
	664.4 Method of Measurement	71
	664.4.2 Rumble Strips	71
	664.5 Basis of Payment	71
	664.6 Pay Items	71
679	OVERLAYING OR PORTLAND CEMENT CONCRETE BRIDGE DECKS	72
	679.3 Construction Methods	72
	679.3.1.1 Removal of Existing Deck Surface Phase I	72
	679.3.1.2 Removal of Existing Deck Surface Phase II	72
	679.6 Method of Measurement	72
 <u>DIVISION 700</u> 		
709	METALS	73
	709.51 U-Channel Breakaway Mounting Devices	73
	709.51.1 General Description and Requirements	73
	709.51.2 General Design and Functionality	73
	709.51.3 Individual Component Features	74
	709.51.3.1 Breakaway Coupler	74
	709.51.3.2 Anchor	74
	709.51.3.3 Receiver	74
	709.51.4 Component Materials and Coatings	75
714	CONCRETE, CLAY, FIBER AND PLASTIC CULVERTS	75
	714.23 Precast Reinforced Concrete Box Culverts	75
715	MISCELLANEOUS MATERIALS	75
	715.8 Waterproofing Fabric	75
	715.10 Prefabricated Drainage System	75
	715.10.1 Prefabricated Pavement Edge Drain	75
	715.10.1.1 General	75
	715.10.1.2 Core	75
	715.10.1.3 Fabric	76
	715.10.1.4 Fittings	76
	715.10.1.5 Outlet Pipe	76
	715.10.1.6 Acceptance	76
	715.11 Engineering Fabric	76

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE #</u>
715.11.1	General	76
715.11.2	Acceptance	76
715.11.3	Maintenance and Repairs	76
715.11.4	Engineering Fabric for Subsurface Drainage	77
715.11.5	Engineering Fabric for Sediment Control (Silt Fence)	77
715.11.6	Engineering Fabric for Erosion Control	77
715.11.7	Engineering Fabric for Paving	77
715.11.8	Engineering Fabric for Separation	77
715.11.9	Engineering Fabric for Stabilization	77
715.11.10	Engineering Fabric for Pumped Sediment and Erosion Control (Dewatering Device)	77
715.12	Concrete for Miscellaneous Users	78
715.14	Elastomeric Bearing Pads	79
715.14.1	Sampling Frequency for Elastomeric Bearing Pads	79
715.41	Traffic Safety Devices	79
715.41.4	Quad Guard Impact Attenuating Device (Type VIII)	79

**DIVISION 100
GENERAL PROVISIONS**

**SECTION 107
LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC**

107.1-LAWS TO BE OBSERVED:

DELETE THE LAST SENTENCE AND REPLACE WITH THE FOLLOWING:

The Contractor shall at all times observe and comply with all such laws, ordinances, regulations, orders and decrees; and shall protect and indemnify, defend and hold DOH harmless from any and all claims, liabilities and causes of action for any fines or penalties imposed on DOH by any state or federal agency because of violation by CONTRACTOR or any of its subcontractors and/or consultants of any state or federal law or regulation.

107.2-PERMITS, LICENSES, AND TAXES:

ADD THE FOLLOWING PARAGRAPH TO THE SECTION:

The Contractor shall provide the Division with sufficient documentation that all applicable taxes have been paid within 120 days of the project acceptance as provided for in 105.16. The Division shall have the right to revoke the Contractor's Prequalification until the Contractor provides sufficient documentation that all taxes have been paid or are the subject of a timely filed dispute currently pending in a court or other body having legal authority and jurisdiction to hear the dispute.

107.14-RESPONSIBILITY FOR DAMAGE CLAIMS:

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

107.14-RESPONSIBILITY FOR DAMAGE CLAIMS:

The Contractor shall indemnify and save harmless the Division, its officers and employees, from all suits, actions, or claims of any character brought because of any injuries or damage received or sustained by any person, persons, or property on account of the operations of the Contractor, its subcontractors and/or consultants; or on account of or in consequence of any neglect in safeguarding the work; or through use of unacceptable materials in constructing the work; or because of any act or omission, neglect, or misconduct of the

Contractor its subcontractors and/or consultants; or because of any claims or amounts recovered from any infringements of patent, trademark, or copyright; or from any claims or amounts arising or recovered under the "Worker's Compensation Act," or any other law, ordinance, order, or decree; and so much of the money due the Contractor under and by virtue of their Contract as may be considered necessary by the Division for such purpose may be retained for the use of the Division or, in case no money is due, their surety may be held until such suit or suits, action or actions, claim or claims for injuries or damages as aforesaid shall have been settled and suitable evidence to that effect furnished to the Division; except that money due the Contractor will not be withheld when the Contractor produces satisfactory evidence that the Contractor is adequately protected by public liability and property damage insurance.

107.21-PROTECTION OF RIVERS, STREAMS, AND IMPOUNDMENTS:

107.21.1-Erosion and Siltation Control:

DELETE THE ENTIRE SUB-SUBSECTION AND TITLE AND REPLACE WITH THE FOLLOWING:

107.21.1-Erosion and Sedimentation Control:

The Contractor shall be responsible for water quality throughout the duration of construction in accordance with the National Pollutant Discharge Elimination System (NPDES) permit registration with the West Virginia Department of Environmental Protection Agency (WVDEP). The Contractor will responsible for the following:

- i. Developing and implementing an effective erosion and sediment control plan.
- ii. Directing the construction, operation, maintenance and dismantling of temporary erosion and sediment control features.
- iii. Implementing remedial action to correct and/or repair failing erosion and sediment control features.
- iv. Implementing storm and winter shutdown procedures.
- v. Shaping the earthwork prior to the suspension of grading operations each day in a manner that will permit storm runoff with minimum erosion.
- vi. Installing, operating and maintaining erosion and sediment control features in an acceptable condition.
- vii. Cleaning out and restoring to original conditions any erosion or sediment control feature that has reached half of its capacity. For sediment basins, one half of its capacity is considered as wet volume storage.

The Contractor shall prepare a Spill Prevention, Control and Countermeasures (SPCC) plan that itemizes specific measures that will be

implemented to prevent and clean up chemical and petroleum product spills that may occur during all phases of construction. Fuel storage and refueling activities, equipment maintenance activities and equipment washing will be kept at least 500 feet away from any watercourse or wetland.

Any details not shown in the plans shall be in accordance with the latest version of the West Virginia Division of Highways Erosion and Sediment Control Manual. In the event that temporary erosion and sediment control measures are necessary due to the Contractors negligence, carelessness or failure to install permanent controls as part of the work as scheduled, such work shall be performed by the Contractor at his own expense.

In addition to the above, the Contractor shall make themselves familiar with all requirements contained within the WVDEP's General Water Pollution Control Permit, Stormwater Associated with Construction Activities Permit Number WV0115924. A copy of this permit can be found at the following internet address:

<http://www.dep.wv.gov/WWE/Programs/stormwater>

Noncompliance with permit conditions constitutes a violation of the Clean Water Act and State Code and is subject to enforcement action by the WVDEP.

At the Project's Pre-Construction Conference, the Contractor shall submit to the Department in addition to the appropriate number of Erosion and Sediment Control Plans, the Co-Applicant #1 signature page (Exhibit 1) and the Contractor's E&S Manager Contact.

The Contractor's E&S Contact shall contain the following information: the name, title, mailing address and telephone number of the person who will be responsible for the Erosion and Sediment Control plans, implementation, maintenance, etc., for the life of the NPDES registration.

Upon completion of the Pre-Construction Conference, the Department will modify the existing NPDES registration for this project to make the Contractor the number one Co-Applicant to the permit. Once this has been completed, the Contractor shall be responsible for any and all fees, violations and fines assessed against the project that is a result of the Contractor's negligence, carelessness, or failure to install permanent controls as part of the work as scheduled.

Once the project is complete, the Contractor will still bear responsibility for the NPDES registration until either a Notice of Termination (NOT) is received from the WVDEP or the Contractor has received final payment for the project. If an NOT has not been received by the time the final payment is made, the Department will modify the NPDES registration to remove the Contractor's name from the registration.

The exhibit can be located online at:

<http://www.transportation.wv.gov/highways/contractadmin/specifications/107.21.1EnSExhibit1/Pages/default.aspx>

**SECTION 107.21.1 EXHIBIT 1
COAPPLICANT #1 SIGNATURE PAGE**

	Co-Applicant #1:	New NPDES Storm Water Construction
	Co-Applicant #1 Signature Page	Project Name:

BY COMPLETING AND SUBMITTING THIS APPLICATION, I HAVE REVIEWED AND UNDERSTAND AND AGREE TO THE TERMS AND CONDITIONS OF THE GENERAL PERMIT ISSUED ON NOVEMBER 5, 2007. I UNDERSTAND THAT PROVISIONS OF THE PERMIT ARE ENFORCEABLE BY LAW. VIOLATION OF ANY TERM AND CONDITION OF THE GENERAL PERMIT AND/OR OTHER APPLICABLE LAW OR REGULATIONS CAN LEAD TO ENFORCEMENT ACTION.

I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED ON THIS FORM AND ALL ATTACHMENTS AND THAT, BASED ON MY INQUIRING OF THOSE INDIVIDUALS IMMEDIATELY RESPONSIBLE FOR OBTAINING THE INFORMATION, THE INFORMATION SUBMITTED IS, TO THE BEST OF MY KNOWLEDGE AND BELIEF, TRUE, ACCURATE, AND COMPLETE. I AM AWARE THAT THERE ARE SIGNIFICANT PENALTIES FOR SUBMITTING FALSE INFORMATION, INCLUDING THE POSSIBILITY OF FINE AND IMPRISONMENT.

(CO-APPLICANT #1 SIGNATURE)

Print Name:

Print Title:

Date:

PRIOR TO FILING THIS APPLICATION, YOU MAY WISH TO OBTAIN A COPY OF THE LEGISLATIVE RULES OF THE DEPARTMENT OF ENVIRONMENTAL PROTECTION, TITLE 47, SERIES 26, WATER POLLUTION CONTROL PERMIT FEE SCHEDULE IN ORDER TO DETERMINE THE APPROPRIATE PERMIT APPLICATION FEE REQUIRED TO ACCOMPANY YOUR SUBMISSION OF THIS APPLICATION. YOU CAN OBTAIN A COPY OF THE REGULATION FROM THE SECRETARY OF STATE'S OFFICE, STATE CAPITOL BUILDING, CHARLESTON, WV 25305. HOWEVER, YOU MAY WISH TO USE THE TABLE FOUND IN ITEM V. OF THE ATTACHED INSTRUCTIONS.

ALL SPILLS OR ACCIDENTAL DISCHARGES ARE REQUIRED TO BE REPORTED IMMEDIATELY TO THE EMERGENCY RESPONSE SPILL ALERT SYSTEM TOLL FREE TELEPHONE NUMBER 1-800-642-3074. CALLS FROM OUT OF STATE SHOULD BE MADE TO 304-348-8899.

**SECTION 108
PROSECUTION AND PROGRESS**

108.3-PROSECUTION OF THE WORK:

108.3.1-General:

DELETE PARAGRAPH SIX AND REPLACE WITH THE FOLLOWING:

Critical Path Method (CPM) Schedules will be required for all projects on which the Contract Bid Amount is equal to or exceeding \$7,500,000 or containing an I/D Clause, except for project types as noted above.

DELETE PARAGRAPH TEN AND INSERT THE FOLLOWING AS PARAGRAPHS TEN AND ELEVEN:

The Contractor may submit a Schedule with a Substantial Completion date earlier than the Contract Completion Date set forth in the Proposal. However, the Division will not be liable in any way for the Contractor's failure to complete the Project prior to the specified

Contract Time except as when provided in section 108.6. Any additional cost, including extended overhead incurred between the Contractor's scheduled completion date and the Contract Completion Date set forth in the Proposal, shall be the responsibility of the Contractor.

Should the Schedule indicate an earlier completion date than the time for completion set forth in the Contract, the Schedule shall define any positive float developed between an early completion point and the Contract completion date as part of the overall project float. It is understood by the Contractor and the Division that positive float is a shared commodity, not for the exclusive use or benefit of either party. Either party has the full use of the positive float until it is depleted.

108.6.2-Extension of Contract Time:

DELETE PARAGRAPH SEVEN AND REPLACE WITH THE FOLLOWING:

Only delays in the activities on the critical path, or in the absence of scheduling requirements, delays in the controlling operation will be considered for a Contract Time extension, provided when required, the Contractor has submitted proper notification and supporting documentation justifying the request. For projects with Schedule requirements, Time Extension reviews will be evaluated along the critical path, as determined by the project's longest path. Time Extension reviews will consider the free float and total float of all relevant activities in determining the actual project delay. The Engineer shall within fourteen (14) Calendar Days advise the Contractor in writing of the approval or rejection of the time extension request. If approved, the extended time for completion shall then be in full force and effect the same as though it were the original time for completion.

**SECTION 109
MEASUREMENT AND PAYMENT**

109.9-PRICE ADJUSTMENT OF FUELS:

DELETE PARAGRAPH TWO AND REPLACE WITH THE FOLLOWING:

Product price quotations for Fuel Oil No. 2 (diesel fuel) as published by the Oil Price Information Service (**OPIS**) will be utilized to establish the Contract Base Price (**Cbp**) as well as the Monthly Base Price (**Mbp**) thereafter. These prices will be the average of the individual prices for the following locations:

Charleston, West Virginia
Ashland, Kentucky
Pittsburgh, Pennsylvania
Roanoke, Virginia
Marietta, Ohio

as published on the Wednesday prior to the first day of the month, with the effective date of the index being the first day of the month. If the Wednesday prior to the first day of the month falls on a holiday or the price is otherwise not published for that date, the index prices will be based on the next earliest date as published by **OPIS**.

109.10-PRICE ADJUSTMENT OF ASPHALT BINDER:

DELETE THE PARAGRAPH TWO AND REPLACE WITH THE FOLLOWING:

Because of the uncertainty in estimating the cost of petroleum products that will be used during the life of this contract, adjustments in compensation for certain contract items is provided for as follows:

The contract items listed in Table 109.10.1, will be adjusted in accordance with the Division's indices for asphalt binder. The bidding index (Ib) for asphalt binder will be equal to the placement index as listed on the Contract Administrations website for Fuel and Asphalt adjustments for the Wednesday prior to the first day of the month, with the effective date of the index being the first day of the month. If the Wednesday prior to the first day of the month falls on a holiday or the price is otherwise not published for that date, the index will be based on the next earliest date as reported. The placement index (Ip) will be the price in effect on the first of the month in which the specific adjustable material was actually placed. Both the bidding index (Ib) and the placement index (Ip) will be based on the average of the posted prices of PG 64-22 asphalt binder per ton/megagram as reported from the following sources on the Wednesday prior to the first day of each calendar month:

Marathon Petroleum Company, LLC, Catlettsburg, Kentucky
Marathon Petroleum Company, LLC, Floreffe, Pennsylvania
Asphalt materials, Inc., Marietta, Ohio
NuStar Asphalt Refining Company, Baltimore, Maryland
Associated Asphalt, Martinsburg, West Virginia

The bidding index (**Ib**) and the placement index (**Ip**) may be found posted on Contract Administration's website for Fuel And Asphalt Prices at the following link:

<http://www.transportation.wv.gov/highways/contractadmin/Lettings/Pages/FuelandAsphaltPrices.aspx>.

If one of the sources listed above changes ownership and/or name the posted price for that terminal will continue in use as though the ownership and/or name change had not occurred.

If one of the sources used for determining either the bidding index or the placement index goes out of business, any future index will be based on the average of the remaining sources. Thus, the bidding index (**Ib**) could be based on the average of five sources and the placement index (**Ip**) on the average of four sources or vice-versa. If a source that goes out of business reopens at a later date, the placement index would once again be based on the average of five sources as indicated above.

The posted price for each source will be compared to the average of all sources. If the difference between the average and the individual price is greater than 25 % of the average, that individual source will be excluded from the calculation of the average price (**Ib**) or (**Ip**) and a new average will be calculated using the remaining sources.

Sources chosen for the index are required to report their posting to the Division no later than the Wednesday prior to the first day the month. Failure to report in a timely manner may impact source approval.

The portion of the contract unit price which reflects the cost of the specified material will be adjusted for the change in accordance with the following formulae:

$$Pa = Q*AC*(Ip - Ib)$$

Where:

Pa = Price Adjustment

Ip = Price Index at time of placement

Ib = Price Index for Bidding

*AC*¹ = Asphalt Content (see Table 109.10.1)

Q = "As Constructed" Quantity

The price index for determining price adjustments for all work performed after the contract completion date, as revised by approved time extensions, will be determined as follows: The price index (**Ip**) shall be for the month in which the contract completion date (as extended) falls, or the price index for the month in which the work was performed, whichever is less.

**Table 109.10.1 - TABLE OF MATERIALS TO BE ADJUSTED FOR
PRICE OF ASPHALT AT THE TIME OF PLACEMENT
(English & Metric)**

Item Number	Asphalt Content (%)						
311006-001	3.2%	401002-021	5.7%	401003-015	5.0%	402001-026	4.9%
401001-020	3.9%	401002-022	5.7%	401007-020	5.7%	402001-027	4.9%
401001-021	3.9%	401002-023	7.6%	401007-021	5.7%	402001-028	4.9%
401001-022	3.9%	401002-024	7.6%	401007-022	5.7%	402001-029	6.7%
401001-023	5.0%	401002-025	7.6%	401007-023	5.7%	402001-030	6.2%
401001-024	5.0%	401002-026	5.7%	401007-024	5.7%	402001-031	7.6%
401001-025	5.0%	401002-027	5.7%	401007-025	5.7%	402001-032	7.6%
401001-030	3.9%	401002-028	5.7%	401007-030	5.7%	402001-033	7.0%
401001-031	3.9%	401002-029	7.6%	401007-031	5.7%	402001-034	4.9%
401001-032	3.9%	401002-030	7.6%	401007-032	5.7%	402001-035	5.2%
401001-033	5.0%	401002-031	7.6%	401007-033	5.7%	402001-036	5.0%
401001-034	5.0%	402001-035	4.9%	401007-034	5.7%	402001-038	7.6%
401001-035	5.0%	402001-036	4.9%	401007-035	5.7%	402001-039	7.6%
401001-040	5.0%	402001-037	4.9%	401007-040	6.0%	402001-040	6.0%
401001-041	5.0%	401002-040	4.9%	401007-041	6.0%	402001-041	6.0%
401001-042	4.5%	401002-041	4.9%	401007-043	6.0%	402001-045	5.5%
401001-043	4.5%	401002-042	4.9%	401007-044	6.0%	402001-046	5.5%
401001-044	5.0%	401003-001	5.0%	401007-050	6.0%	402001-050	5.0%
401001-045	5.0%	401003-002	5.0%	401007-051	6.0%	402001-051	5.0%
401001-046	4.5%	401003-003	5.0%	401007-053	6.0%	402001-055	7.6%
401001-047	4.5%	401003-006	5.0%	401007-054	6.0%	402001-056	7.6%
401001-050	4.1%	401003-007	5.0%	402001-020	6.2%	402001-060	6.0%
401001-051	4.1%	401003-008	5.0%	402001-021	6.2%	402001-061	6.0%
401001-055	4.1%	401003-011	5.0%	402001-022	6.2%	402001-065	5.5%
401001-056	4.1%	401003-012	5.0%	402001-023	7.6%	402001-066	5.5%
401002-020	5.7%	401003-013	5.0%	402001-024	7.6%	402001-070	5.0%
		401003-014	5.0%	402001-025	7.6%	402001-071	5.0%

The bidding Indexes (Ib) and the placement indexes (Ip) may be found posted on Contract Administrations website for Fuel And Asphalt Prices at the following link:

<http://www.transportation.wv.gov/highways/contractadmin/Lettings/Pages/FuelandAsphaltPrices.aspx>

The bidding index (Ib) for asphalt binder will be listed on the Contract Administrations website for Fuel and Asphalt adjustments for the Wednesday prior to the first day of the month, with the effective date of the index being the first day of the month for which the contract is let.

Any dispute concerning the bidding index shall be resolved during the first voucher estimate review.

DIVISION 200 EARTHWORK

SECTION 203 DISMANTLING STRUCTURES

203.1-DESCRIPTION:

DELETE PARAGRAPH ONE AND REPLACE WITH THE FOLLOWING:

This work shall consist of dismantling such structure or structures specifically designated on the Plans for removal, match marking, handling and storage if called for, or disposal if required.

203.3-CONSTRUCTION METHODS:

DELETE PARAGRAPH ONE AND REPLACE WITH THE FOLLOWING:

The work shall include dismantling and storing, or disposing of designated structures by such methods as specified on the Plans. If the old structure is remain the property of the Division, it shall be carefully dismantled without unnecessary damage, the parts match marked, and carefully stored or erected as required by the Plans or as directed by the Engineer.

Unless otherwise noted in the plans, all material removed shall become the property of the contractor and shall be removed. Disposal, if required, shall be accomplished in accordance with the provisions of 201. The final ground around dismantled structures shall conform to the final grading plan or shall be graded to drain as directed by the Engineer. The bridge may contain lead base paint and the Contractor shall provide protection for their Workers as per the requirements of 29 CFR 1926.62.

SECTION 207 EXCAVATION AND EMBANKMENT

DELETE THE CONTENTS AND REPLACE WITH THE FOLLOWING:

207.6.5-Construction/Demolition Waste Material: The Code of State Rules for the West Virginia Department of Environmental Protection Title 33 Series 1 Section 2.38 defines "Construction/Demolition Waste" as waste

building materials, packaging, and grubbing waste, resulting from construction, remodeling, repair and demolition operations on houses, commercial and industrial buildings, including, but not limited to, wood, plaster, bricks, blocks and concrete, and other masonry materials, but does not include asbestos-containing materials, household furnishings, burnt debris, material containing lead-based paint, pressure-treated wood, contaminated solid waste, yard waste or waste tires, and other items listed in subdivision 5.4.a of the Title 33, Series 1, in the Code of State Rules.

The Code of State Rules for the West Virginia Department of Environmental Protection Title 33 Series 1 Section 3.16.e.2.C. provides an One-Half Acre Exemption for Division of Highways Projects. The Division of Highways or its contractors working on highway construction that dispose of construction/demolition waste material, which, for the purpose of this paragraph, includes Category I Nonfriable Roofing, are exempt from the permitting requirements of the rule, provided that the disposal area does not exceed one-half acre, does not fill natural wetlands, adheres to best management practices for construction, maintains cover over the material, and the parties are obligated by contract to comply with all disposal provisions specified by the West Virginia Division of Highways Standard Specifications, Roads and Bridges, including supplemental specifications published by the Division of Highways (Standard Specifications). This exemption does not apply to multiple one-half acre sites on the same parcel of land, or to disposal of material not generated by the highway project. Eligibility for this exemption requires the Division of Highways or its contractors provide the Secretary for the West Virginia Department of Environmental Protection with seven (7) days notice prior to disposal and a copy of the landowner agreement. Eligibility also requires proper management of the site by the Division of Highways.

Hazardous Waste disposal shall be conducted in accordance with State and Federal Laws and Regulations. Hazardous Waste shall be taken to an EPA approved Hazardous Waste Disposal facility.

The legitimate beneficial reuse of clean bituminous (asphaltic) concrete, Portland cement concrete and other clean masonry substances for the purpose of fill, riprap, road surfacing or road base material is exempt from the West Virginia Department of Environmental Protection permitting requirements of the rule, provided that any such fill will not be placed in natural wetlands, adheres to the best management practices for construction and maintains cover over the material when used as a structural component of a fill, and provided further that bituminous (asphaltic) concrete may not be used for riprap material.

For the purpose of the above paragraph, "clean" will be defined as uncontaminated bituminous (asphaltic) concrete, Portland cement concrete, or masonry material that does not have protruding metal prior to its reuse. In cases where Portland cement concrete is used as riprap and that concrete contains metal, the Secretary of the West Virginia Department of

Environmental Protection will decide on a case-by-case basis whether this reuse is eligible for an exemption under this rule.

Concrete, stone, brick, and other masonry materials which have been broken into pieces not exceeding 2 ft. (600 mm) in any dimension may be permitted in embankments but not within 2 ft. (600 mm) of the subgrade 1 ½ ft. (450 mm) of the top of the side slopes. Material such as wood, steel, and broken concrete matted together by steel reinforcement will not be permitted in any portion of the embankment. All voids shall be completely filled with suitable material and compacted to the density specified in 207.

Portland cement concrete and bituminous (asphaltic) concrete removed from a project may be used as fill in a waste site provided the placement is in accordance with Section 207.7.3.2.3-Rock. All Portland cement concrete and bituminous (asphaltic) concrete in the waste site shall be covered with a minimum of 2 ft. (600 mm) of soil. The fill area of Portland cement concrete and bituminous (asphaltic) concrete shall not be within 300 feet (91m) of a wetland, a perennial stream, or within the 100-year floodplain.

The Contractor shall take all precautions for the stability of slopes in any waste site containing Construction/Demolition waste by benching or other methods to prevent slides and slip outs. It may be necessary to compact the Construction/Demolition waste to ensure stability. Construction/Demolition waste materials shall not be burned. Construction/Demolition waste materials which do not qualify for the Exemptions in the Code of State Rules for the West Virginia Department of Environmental Protection Title 33 Series 1 must be recycled or disposed of in a DEP approved landfill.

The Contractor shall not allow any temporary disposal sites on the right-of-way to remain after construction is completed and must dispose of all Construction/Demolition waste in accordance with this section.

207.9-SUBGRADE

DELETE SENTENCE TWO OF PARAGRAPH TWO AND REPLACE WITH THE FOLLOWING:

The tolerance set forth in section 207.9.1 shall apply.

ADD THE FOLLOWING SUBSECTION TO THE SECTION:

207.9.1-Tolerance: The completed surface shall not vary more than ½ inch (13mm) above or below plan grade. Deviations shall be corrected by scarifying, adding additional approved aggregate if necessary, and recompacting.

The subbase course shall be checked for proper thickness after final compaction. The Contractor shall refill all test holes with approved material and adequately recompact the material.

Any deficiency in total thickness of the subbase in excess of 1 inch (25mm) shall be corrected.

SECTION 211 BORROW EXCAVATION

211.2-MATERIALS:

ADD THE FOLLOWING:

211.2.4-Impervious Core: Materials shall meet the requirements specified in Section 211.3.3.

CONSTRUCTION METHODS

211.3-GENERAL:

DELETE ALL AND REPLACE WITH THE FOLLOWING:

The Contractor shall locate and furnish all borrow sites to obtain materials in the amounts directed, by the methods and subject to the same provisions as prescribed in 207 except as modified or amended within. Borrow excavation should not be obtained or placed until after all available roadway excavation has been utilized in the embankments and there is no likelihood of slip or excess material. The Contractor will have the option to borrow within the WVDOH right-of-way limits (R/W) or on private property located outside the R/W. If the Contractor chooses to borrow within the R/W, the following procedure must be adhered to before any borrow will be allowed:

211.3.1-Borrow within WVDOH R/W Limits: The Contractor shall submit copies of a site plan for any borrow within the R/W and each page/sheet of all submittals shall be signed by a professional Engineer Registered in the State of West Virginia. The submittals and the approving Engineers' signature block shall be as per Section 105.2.1.2 for shop drawing submittals.

The plan for the site shall include, but not be limited to:

1. The location and approximate boundaries of the borrow site, including any adjacent landowner property information;
2. Topographical features including existing and final ground slopes, drainage structures, etc;
3. Storm water features, roads, access to properties, utilities, etc;
4. An erosion and sediment control plan utilizing the best management practices consistent with all phases of operation of the borrow site;

5. Restoration or cover vegetation plan of the site;
6. If the borrow site requires the modification of an existing US Army Corps of Engineers permit, the Contractor shall provide the necessary revised permit drawings to show the proposed changes to the DOH in order to modify the existing 404 permit and to obtain a 401 Water Quality Certification if necessary. A minimum of 2 months may be required to get approval.

Steepening of slopes will not be allowed for borrow sites within the R/W without a geotechnical analysis.

Upon receipt of the Contractor's complete borrow site submission, the Engineer shall follow the guidelines as set forth in the latest edition of the Erosion and Sediment Control Manual for review and acceptance by the Division. The Contractor may be required to revise the site plan prior to acceptance by the Division. The Contractor's borrow site plan must be approved as per section 105.2.1.2 and the West Virginia Department of Environmental Protection before any borrow material can be obtained from the site.

The DOH will bear the cost of all features associated with the borrow site except for necessary revisions to drainage structures (i.e. lengthening of culverts, etc.).

Upon completion of work, all borrow sites shall be neatly trimmed and drained and all debris and spoil disposed of in accordance with the approved plan. No material shall be borrowed from places other than those approved, except as provided. Slopes shall be trimmed neatly to present a uniform surface, free from hollows or protrusions and loose or overhanging rocks. The Contractor shall take precautions by benching or other methods to prevent slides and slip outs. Borrow areas shall be graded by the Contractor then fertilized, seeded and mulched in accordance with the applicable Specifications and will be paid for in accordance with the pay items within the contract.

The Contractor shall minimize pollution or sedimentation of rivers, streams, lakes, ponds, and other bodies of water while conducting borrow operations.

211.3.2-Borrow outside of WVDOH R/W Limits: For borrow sites outside the R/W, the Contractor and/or property owner shall bear all costs and responsibilities associated with the site. Appropriate Traffic Control items within the Project Limits will be paid accordingly. The Contractor and/or property owner shall comply with existing laws and/or regulations to include approval from the State Historic Preservation Officer and save the State harmless from any claims for damages which may result from the borrow.

The Contractor shall minimize pollution or sedimentation of rivers, streams, lakes, ponds, and other bodies of water while conducting borrow operations.

Borrow pits shall not be excavated below the level of the natural drainage for the area, and the drainage ditches required to keep the pit free from standing water during the progress of the work and upon completion and shall be constructed without extra compensation.

211.3.3-Impervious Core: Imperious cores shall be constructed for all sediment dams built of rock, gravel, and pervious soils.

The impervious core shall have a minimum dimensions as set forth in Item 5, par. 20.3.4.3.1 *Erosion and Sediment Control Manual*, West Virginia Division of Highways, latest edition.

When a key is necessary for the sediment dam, the impervious core shall be made an integral part of the key. When the impervious core is not constructed of soil, the core shall be anchored into the key by trenching for a minimum depth of 2 feet (610 mm).

The impervious core may be constructed using one of the following methods:

- a) **Soil Impervious Core:** Soil impervious cores may be shaped to facilitate placement and compaction. The coefficient of permeability of the soil used for the impervious core must be 10^{-4} cm per sec or less. A key, a minimum of 4 feet (1.2 m) in depth, must be constructed into the original ground. The compaction of the impervious core shall be as in accordance with Section 716.3.
- b) **Concrete Impervious Core:** When concrete is used for the impervious core, Class B Concrete shall be used. The requirements of Section 601, Structural Concrete shall control the mixture and placement of the concrete. The Engineer may waive the testing of the Class B Concrete if the concrete is from an approved plant.
- c) **HDPE or LLDPE Impervious Core:** When the impervious core is constructed of High Density Polyethylene (HDPE) or Low Linear Density Polyethylene (LLDPE), the liner shall be manufactured to be suitable for buried conditions and may be either smooth or textured. The Contractor shall obtain recommendations from a liner manufacturer for the material best suited for impervious cores, handling, storage, and construction procedures. The manufacturer of the liner shall furnish the Engineer a Letter of Certification stating the liner is suitable for the intended use.
- d) **Other Methods for an Impervious Core:** The Contractor may design and use other methods of preventing the seepage of water from the wet area. The Engineer must approve the design of the alternative method.

When the impervious core is not constructed use the Soil Impervious Core method the Contractor shall submit a plan containing construction details and materials to be used for the impervious core(s) for the approval of the Engineer prior to the start of work and the purchase of any materials. This submittal will be part of the temporary and permanent pollution control schedules and methods required by Section 642.3-Preconstruction Conference, Construction Methods, Section 642, Temporary Pollution Control, of the *West Virginia Division of Highways Standard Specifications Roads and Bridges*, latest edition.

211.5-ROCK BORROW EXCAVATION:

ADD THE FOLLOWING TO THE SECTION AS THE LAST SENTENCE TO PARAGRAPH ONE:

Stones used for scour protection shall be in accordance with section 218.4.1.

**SECTION 218
SLOPE AND FOUNDATION PROTECTION**

218.4-FOUNDATION PROTECTION:

ADD THE FOLLOWING TO THE SECTION:

218.4.1-Scour Protection: Stones used for scour protection shall be well graded throughout the thickness as determined by Engineer via visual inspection. Stones smaller than the specified lowest gradation as specified in the plans are not allowed in an amount exceeding 20% by weight. Material quality shall be satisfactory to Engineer. The use of shale is not permitted.

218.7-PAY ITEMS

REVISE ITEM 218006-* IN THE TABLE TO READ AS FOLLOWS:

ITEM NUMBER	DESCRIPTION	UNIT
218006-*	FOUNDATION PROTECTION	CUBIC YARDS (METER)

**DIVISION 300
BASES**

**SECTION 311
OPEN GRADED FREE DRAINING BASE COURSE**

311.2-MATERIALS:

DELETE THE FIRST ROW OF THE TABLE FOR “AGGREGATE” AND REPLACE WITH THE FOLLOWING:

MATERIAL	SUBSECTION	UNIT
Aggregate*	703.1, 703.2, 703.3, 703.4	AASHTO 57, 67, 357, or 467

311.4-COMPOSITION OF OPTIONAL STABILIZING MIXTURES:

DELETE THE SECOND PARAGRAPH AND REPLACE WITH THE FOLLOWING:

If the Portland cement stabilized alternative is chosen, the cement shall be Type 1 and shall have a minimum cement content of 150 ± 5 pounds per cubic yard (90 ± 2 kg per cubic meter). This base course shall be capable of withstanding construction operations without showing any detrimental effects.

311.11-CURING:

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

No curing is required for Portland cement stabilized based.

**DIVISION 400
BITUMINOUS PAYMENTS**

**SECTION 401
HOT-MIX ASPHALT BASE, WEARING,
AND PATCHING AND LEVELING COURSES**

DELETE THE TITLE OF THE SECTION AND REPLACE WITH THE FOLLOWING:

**SECTION 401
ASPHALT BASE, WEARING, AND PATCHING
AND LEVELING COURSES**

401.7-ACCEPTANCE TESTING:

401.7.3-Compaction:

DELETE THE FIRST PARAGRAPH AND REPLACE WITH THE FOLLOWING:

Acceptance testing for compaction shall be performed in accordance with either the Lot-by-Lot method described in Section 401.7.3.1 or the rollerpass procedure described in MP 401.05.20, based the following criteria:

Roadway Type	Compaction Method
Interstate and Expressways	Lot By Lot
APD Routes	Lot By Lot
NHS Routes	Lot By Lot
All other routes and roadways	Determined by Table 401.7.3.A

Patching-and-leveling and scratch courses shall not be included in determining the total new pavement thickness. When HMA is placed in areas that require a non-uniform thickness or is tapered to a thin edge, the method of acceptance testing shall be determined by the Engineer. Acceptance testing is not required on areas in which a full-size roller is restricted from properly compacting the mat. These areas shall be compacted to the satisfaction of the Engineer.

DELETE TABLE 401.7.3A. REPLACE WITH THE FOLLOWING:

TABLE 401.7.3A MAINLINE COMPACTION METHODS				
Traffic Type	Total New Pavement Thickness	Marshall Lift Thickness	Superpave Lift Thickness	Compaction Method *
Heavy ≥ 3 million ESALs	≥ 2.5 inches (63 mm)	≥ 1 inch (25 mm)	≥ 1.25 inch (32 mm)	Lot-by-Lot
		< 1 inch (25 mm)	< 1.25 inch (32 mm)	Rollerpass
	< 2.5 inches (63 mm)	> 1 inch (25 mm)	> 1.25 inch (32 mm)	Lot-by-Lot
		≤ 1 inch (25 mm)	≤ 1.25 inch (32 mm)	Rollerpass
Medium < 3 million ESALs	≥ 3.0 inches (75 mm)	> 1 inch (25 mm)	> 1.25 inch (32 mm)	Lot-by-Lot
		≤ 1 inch (25 mm)	≤ 1.25 inch (32 mm)	Rollerpass
	< 3.0 inches (75 mm)	All lifts	All lifts	Rollerpass

* Any lift that is placed at a thickness of less than two times the nominal maximum aggregate size, as specified in either Table 401.4.2A or Table 401.4.2B, shall be compacted using the rollerpass method.

401.10-PAVING OPERATIONS:

401.10.5-Joints:

DELETE THE SECOND AND THIRD PARAGRAPHS AND REPLACE WITH THE FOLLOWING:

All transverse joints between existing and new pavement shall be “heeled-in” to the existing surface at the beginning and at the end of the project and at all other locations where the new pavement terminates against an existing pavement. Transverse joints between one day's production and the next shall be carefully constructed and shall be formed by cutting back into the existing section to expose the full depth of the course. All joints shall be squared up to the full vertical depth of the course to be placed, and a tack coat of asphalt material shall be applied. Joints adjacent to curbs, gutters, or adjoining pavement shall be formed by transporting back sufficient hot material to fill any space left uncovered by the paver.

The longitudinal joint between adjacent mats shall be set up to a sufficient height to receive the full compactive effort from the rollers and shall be tacked prior to placing adjacent material. If the adjacent mat is placed in the same day, tacking of the longitudinal joint is not required.

401.13-BASIS OF PAYMENT:

401.13.3-

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

401.13.3-When a LOT of HMA pavement does not meet the density requirements of 401.7.3, the Price shall be adjusted as follows:

TABLE 401.13.3A ADJUSTMENT OF CONTRACT PRICE FOR PAVEMENT DENSITY NOT WITHIN TOLERANCE OF DENSITY	
Percent of Density	Percent of Contract Price to be Paid
Greater than 96 %	Note-1
95% to 96%	102
92% to 94% 92 % to 94 %	100
91%	98
90%	96
89%	92
88%	88
Less than 88%	Note-2

Note-1: Mat density slightly above 96% is normally only a problem if it leads to asphalt flushing on the surface of the mat or rutting due to an unstable mix. The Division will make a special evaluation of the material and determine the appropriate action.

Note-2: When the density is less than 92%, the mat will be more susceptible to accelerated deterioration and a decrease in the expected service life of the pavement. For price adjustments on mat densities less than 88%, the percent of Contract Bid Price will be decreased by 10% per percentage of mat density less than 88%, unless a Special evaluation performed by the Division determines a more appropriate action.

401.14-PAY ITEMS

DELETE THE FOLLOWING ITEMS FROM THE TABLE:

ITEM NUMBER	SEQUENCE NUMBERS	DESCRIPTION	UNIT
<i>NOTE A</i> 401001-	001, 002, 003, 006, 007, 008, 011, 012, 014, 015	“design method” HMA/WMA BASE COURSE, **, TY “ <i>mix type</i> ”	TN
<i>NOTE A</i> 402001-	001, 002, 003, 006, 007, 008,	“design method” HMA/WMA WEARING COURSE, **, TY “ <i>mix type</i> ”	TN
<i>NOTE A</i> 401007-	001, 002, 003, 004, 006, 007, 008, 011, 012, 014, 015	“design method” HMA/WMA SCRATCH COURSE, **, TY “ <i>mix type</i> ”	TN

ADD THE FOLLOWING ITEMS TO THE TABLE:

ITEM	DESCRIPTION	UNIT
401001-020	MARSHALL HMA BASE CRSE, SG TY I	TN
401001-021	MARSHALL HMA BASE CRSE, S TY I	TN
401001-022	MARSHALL HMA BASE CRSE, SS TY I	TN
401001-023	MARSHALL HMA BASE CRSE, SG TY II	TN
401001-024	MARSHALL HMA BASE CRSE, S TY II	TN
401001-025	MARSHALL HMA BASE CRSE, SS TY II	TN
401001-030	MARSHALL WMA BASE CRSE, SG TY I	TN
401001-031	MARSHALL WMA BASE CRSE, S TY I	TN
401001-032	MARSHALL WMA BASE CRSE, SS TY I	TN
401001-033	MARSHALL WMA BASE CRSE, SG TY II	TN
401001-034	MARSHALL WMA BASE CRSE, S TY II	TN
401001-035	MARSHALL WMA BASE CRSE, SS TY II	TN
401001-040	SUPERPAVE HMA BASE CRSE, SG TY 19	TN
401001-041	SUPERPAVE HMA BASE CRSE, S TY 19	TN
401001-042	SUPERPAVE HMA BASE CRSE, SG TY 25	TN
401001-043	SUPERPAVE HMA BASE CRSE, S TY 25	TN
401001-044	SUPERPAVE WMA BASE CRSE, SG TY 19	TN
401001-045	SUPERPAVE WMA BASE CRSE, S TY 19	TN
401001-046	SUPERPAVE WMA BASE CRSE, SG TY 25	TN
401001-047	SUPERPAVE WMA BASE CRSE, S TY 25	TN
401001-050	SUPERPAVE HMA BASE CRSE, SG TY 37.5	TN
401001-051	SUPERPAVE HMA BASE CRSE, S TY 37.5	TN
401001-055	SUPERPAVE WMA BASE CRSE, SG TY 37.5	TN
401001-056	SUPERPAVE WMA BASE CRSE, S TY 37.5	TN

ITEM	DESCRIPTION	UNIT
401002-020	MARSHALL HMA WEAR CRSE, SG TY I	TN
401002-021	MARSHALL HMA WEAR CRSE, S TY I	TN
401002-022	MARSHALL HMA WEAR CRSE, SS TY I	TN
401002-023	MARSHALL HMA WEAR CRSE, SG TY III	TN
401002-024	MARSHALL HMA WEAR CRSE, S TY III	TN
401002-025	MARSHALL HMA WEAR CRSE, SS TY III	TN
401002-026	MARSHALL WMA WEAR CRSE, SG TY I	TN
401002-027	MARSHALL WMA WEAR CRSE, S TY I	TN
401002-028	MARSHALL WMA WEAR CRSE, SS TY I	TN
401002-029	MARSHALL WMA WEAR CRSE, SG TY III	TN
401002-030	MARSHALL WMA WEAR CRSE, S TY III	TN
401002-031	MARSHALL WMA WEAR CRSE, SS TY III	TN
401002-035	MARSHALL HMA WEAR CRSE, SG TY IV	TN
401002-036	MARSHALL HMA WEAR CRSE, S TY IV	TN
401002-037	MARSHALL HMA WEAR CRSE, SS TY IV	TN
401002-040	MARSHALL WMA WEAR CRSE, SG TY IV	TN
401002-041	MARSHALL WMA WEAR CRSE, S TY IV	TN
401002-042	MARSHALL WMA WEAR CRSE, SS TY IV	TN
401007-020	MARSHALL SCRATCH CRSE, SG, TYPE I	TN
401007-021	MARSHALL SCRATCH CRSE, S, TYPE I	TN
401007-022	MARSHALL SCRATCH CRSE, SS, TYPE I	TN
401007-023	MARSHALL WMA SCRATCH CRSE, SG, TYPE I	TN
401007-024	MARSHALL WMA SCRATCH CRSE, S, TYPE I	TN
401007-025	MARSHALL WMA SCRATCH CRSE, SS, TYPE I	TN
401007-030	MARSHALL SCRATCH CRSE, SG, TYPE III	TN
401007-031	MARSHALL SCRATCH CRSE, S, TYPE III	TN
401007-032	MARSHALL SCRATCH CRSE, SS, TYPE III	TN
401007-033	MARSHALL WMA SCRATCH CRSE, SG, TYPE III	TN
401007-034	MARSHALL WMA SCRATCH CRSE, S, TYPE III	TN
401007-035	MARSHALL WMA SCRATCH CRSE, SS, TYPE III	TN
401007-040	SUPERPAVE HMA SCRATCH CRSE, SG, TYPE 9.5	TN
401007-041	SUPERPAVE HMA SCRATCH CRSE, S, TYPE 9.5	TN
401007-043	SUPERPAVE WMA SCRATCH CRSE, SG, TYPE 9.5	TN
401007-044	SUPERPAVE WMA SCRATCH CRSE, S, TYPE 9.5	TN
401007-050	SUPERPAVE HMA SCRATCH CRSE, SG, TYPE 4.75	TN
401007-051	SUPERPAVE HMA SCRATCH CRSE, S, TYPE 4.75	TN
401007-053	SUPERPAVE WMA SCRATCH CRSE, SG, TYPE 4.75	TN
401007-054	SUPERPAVE WMA SCRATCH CRSE, S, TYPE 4.75	TN

**SECTION 402
HOT-MIX ASPHALT BASE, WEARING, AND PATCHING
AND LEVELING COURSES**

DELETE THE TITLE OF THE SECTION AND REPLACE WITH THE FOLLOWING:

ASPHALT SKID RESISTANT PAVEMENT

402.5-PAY ITEMS

DELETE THE FOLLOWING ITEMS FROM THE TABLE:

ITEM	SEQUENCE NUMBERS	DESCRIPTION	UNIT
<i>NOTE A</i> 402001-	001, 002, 003, 006, 007, 008, 011, 012, 015, 016	“design method” HMA/WMA ASPHALT SKID RESISTANT PAVEMENT, “aggregate type”, TYPE “mix type”	TN

ADD THE FOLLOWING ITEMS TO THE TABLE:

ITEM	DESCRIPTION	UNIT
402001-020	MARSHALL HMA SKID PVT, SG TY I	TN
402001-021	MARSHALL HMA SKID PVT, S TY I	TN
402001-022	MARSHALL HMA SKID PVT, SS TY I	TN
402001-023	MARSHALL HMA SKID PVT, SG TY III	TN
402001-024	MARSHALL HMA SKID PVT, S TY III	TN
402001-025	MARSHALL HMA SKID PVT, SS TY III	TN
402001-026	MARSHALL HMA SKID PVT, SG TY IV	TN
402001-027	MARSHALL HMA SKID PVT, S TY IV	TN
402001-028	MARSHALL HMA SKID PVT, SS TY IV	TN
402001-029	MARSHALL WMA SKID PVT, SG TY I	TN
402001-030	MARSHALL WMA SKID PVT, S TY I	TN
402001-031	MARSHALL WMA SKID PVT, SG TY III	TN
402001-032	MARSHALL WMA SKID PVT, S TY III	TN
402001-033	MARSHALL WMA SKID PVT, SS TY III	TN
402001-034	MARSHALL WMA SKID PVT, SG TY IV	TN
402001-035	MARSHALL WMA SKID PVT, S TY IV	TN
402001-036	MARSHALL WMA SKID PVT, SS TY IV	TN
402001-038	SUPERPAVE HMA SKID PVT, SG TY 4.75	TN
402001-039	SUPERPAVE HMA SKID PVT, S TY 4.75	TN

ITEM	DESCRIPTION	UNIT
402001-040	SUPERPAVE HMA SKID PVT, SG TY 9.5	TN
402001-041	SUPERPAVE HMA SKID PVT, S TY 9.5	TN
402001-045	SUPERPAVE HMA SKID PVT, SG TY 12.5	TN
402001-046	SUPERPAVE HMA SKID PVT, S TY 12.5	TN
402001-050	SUPERPAVE HMA SKID PVT, SG TY 19	TN
402001-051	SUPERPAVE HMA SKID PVT, S TY 19	TN
402001-055	SUPERPAVE WMA SKID PVT, SG TY 4.75	TN
402001-056	SUPERPAVE WMA SKID PVT, S TY 4.75	TN
402001-060	SUPERPAVE WMA SKID PVT, SG TY 9.5	TN
402001-061	SUPERPAVE WMA SKID PVT, S TY 9.5	TN
402001-065	SUPERPAVE WMA SKID PVT, SG TY 12.5	TN
402001-066	SUPERPAVE WMA SKID PVT, S TY 12.5	TN
402001-070	SUPERPAVE WMA SKID PVT, SG TY 19	TN
402001-071	SUPERPAVE WMA SKID PVT, S TY 19	TN

DIVISION 500 RIGID PAVEMENT

SECTION 501 UNBONDED CONCRETE OVERLAY

501.1-DESCRIPTION:

DELETE THE FIRST PARAGRAPH OF THE SUBSECTION AND REPLACE WITH THE FOLLOWING:

This work shall consist of a pavement or an unbonded overlay pavement composed of portland cement concrete, with or without reinforcement as shown on the Plans, constructed on a prepared subgrade, base course, or existing pavement in accordance with these Specifications and in reasonably close conformity with the lines, grades, thicknesses, and typical cross sections shown on the Plans or established by the Engineer.

501.4-TESTING:

501.4.5-Compressive Strength Tests for Acceptance:

ADD THE FOLLOWING PARAGRAPH AT THE END OF THE SUBSECTION:

Compressive strength of concrete overlays less than 8 inches (200 mm) in thickness shall be determined in accordance with Section 601.4.4, with one set of test specimens representing a maximum of 500 yd³ (380 m³) of concrete.

501.6-PREPARATION OF GRADE, SETTING FORMS, AND CONDITIONING OF SUBGRADE OR BASE:

ADD THE FOLLOWING SUBSECTION:

501.6.3.1-Conditioning of Surfaces Receiving an Unbonded Concrete Overlay: If required, the bond breaker/leveling course for unbonded concrete overlays shall be constructed as shown on the Plans.

Construct any specified hot-mix asphalt base, bond breaker, or patching and leveling course in accordance with Section 401. Remove all loose materials from the existing pavement prior to placing the asphalt.

If required on the Plans, mill the surface before concrete placement in accordance with Section 415. After milling, tight blade the surface to remove ridges and loose material. Prior to placement of the overlay, the milled surface shall be swept clean. The Engineer shall be notified if

milling operations expose underlying concrete pavement. All areas where the underlying concrete pavement is exposed shall be repaired, regardless of size. The Contractor shall first determine, in the presence of the Engineer, if the remaining asphalt surrounding the area of exposed concrete is sound. This asphalt shall be considered sound if it cannot be easily removed by prying it loose with a shovel. If it can be easily removed in such a manner, the Contractor shall continue to remove all such unsound asphalt until sound asphalt is encountered. If the asphalt surrounding the exposed concrete area is less than 2 inches (50 mm) thick, greater than 50 square feet (4.6 square meters) or are wider than 6 feet (1.8 meters) in the transverse direction, spray exposed concrete with tack coat meeting the requirements of Section 408 and cover with engineering fabric meeting the requirements of Section 715.11.8. If the asphalt surrounding the exposed concrete area is 2 inches (50 mm) or more in thickness, repair the exposed concrete area with an asphalt patch of the same thickness as the surrounding asphalt with either a Base-II or 19 mm mix in accordance with Section 401.

501.9-PLACING CONCRETE:

ADD THE FOLLOWING PARAGRAPHS TO THE END OF THE SUBSECTION:

When placing an unbonded concrete overlay, place the concrete when the base temperature is below 115° F (46° C). Reduce the temperature by spraying a fine water fog on the base. Ensure water does not pond in front of the plastic concrete. The application of white curing compound or a lime slurry shall be permitted as temperature control measures when waterproof bases are encountered. Concrete shall not be placed if frost exists in the base or if the base temperature is below 35° F (2° C).

When placing unbonded concrete overlays, concrete should be placed on the grade to the nominal thickness shown on the Plans. Any deviations for profile adjustments, and/or cross section adjustments, should be above the nominal thickness. When adjustments are necessary for grade or yield improvement, the thickness shall not, in any case, be less than the minimum thickness shown on the Plans.

501.11-JOINTS:

DELETE THE ENTIRE SECTION AND ADD THE FOLLOWING:

Joints shall be constructed of the type and dimensions and at the locations shown on the approved Joint Layout Plan(s). The Contractor shall submit for approval a Joint Layout Plan for all intersections on the project in general accordance with the following: "Street Jointing Criteria: Ten Rules Of Practice" as suggested by the Portland Cement Association (PCA), Skokie, Illinois; the

American Concrete Pavement Association’s Intersection Joint Layout Guidelines; the West Virginia Division Of Highways’ Standard Specifications, dated 2010 and the latest issue of any subsequent Supplemental Specifications; the West Virginia Division Of Highways’ “Standard Details Book Volume 1 – Drainage, Guardrail, Pavement, Fence, and Markers” hereinafter referred to as “Standard Details Volume 1”; or as directed by the Engineer.

The “Street Jointing Criteria: Ten Rules of Practice” suggested by the PCA are paraphrased and revised for the West Virginia Division of Highways’ needs as follows:

- i. Joints are used in concrete pavement to aid construction and to minimize random cracking. Avoid odd-shaped areas of pavement.
- ii. Space longitudinal joints not to exceed 12.0 ft. (3.8 m). The contractor shall decide on the type of longitudinal joint as shown on Standard Detail Sheet PVT1 of “Standard Details Volume 1” needed depending on the type of construction. Type D joints will be used for full-width construction. Type D joints with a projecting tie bar for the following lane/shoulder pour are acceptable. Type E joints without the key are acceptable for lane-at-a-time construction. Type F joints are not acceptable at any location on the project.
- iii. Space transverse joints at regular intervals of 15.0 ft. (4.6 m) or less.
- iv. Thinner slabs tend to crack at closer intervals than do thicker slabs. Long narrow slabs tend to crack more than square ones.
- v. All contraction and expansion joints must be continuous through any Combination Concrete Curb and Gutter or Integral Concrete Curb (Standard Sheet PVT6, Sheet 1 of 2 of Standard Details Volume 1). See Standard Specification Section 610.3.4.
- vi. Longitudinal construction joints should be butt-type joints with tiebars (Types D or E joints based on construction method) as shown on Standard Detail Sheet PVT1 of Standard Details Volume 1. The purpose of these tiebars is to hold adjacent slabs in vertical alignment. The normal backfill behind any integral curb or curb and gutter constrains the slabs and holds them together. With separate curb and gutter built on fill, use Type E Joints as shown on Standard Detail Sheet PVT1 of Standard Details Volume 1.
- vii. Offsets at radius points should be at least 2.0 ft. (0.60 m) in width. Angles of less than 60° shall be avoided.
- viii. Make minor adjustments in joint locations to meet all structures projecting through, into or against the pavement. Minor adjustments should not make any joint spacing greater than that specified in ii. and iii. in this list.
- ix. (Deleted)

- x. Manhole and inlet frames, as well as any other metal structure projecting through, into or against the pavement shall be isolated in accordance with 501.11.6.

The Contractor shall submit a Joint Layout Plan for each intersection on the Project to the Engineer for approval a minimum of 10 working days before ordering materials. No work on or ordering of materials for the intersections shall be performed until the Engineer has approved the Joint Layout Plan(s). These Submittals are not required to be signed and sealed by a Registered Professional Engineer.

501.11.1-Longitudinal Joints: Deformed steel tie bars (Type D joint) or tie bolt assemblies (Type E joint) shall be placed perpendicular to the longitudinal joints. They shall be placed by suitable mechanical equipment or rigidly secured by suitable supports to prevent displacement. Tie bars shall be epoxy coated and free of grease, oils, dirt, paint or other foreign materials, and shall not be enclosed in tubes or sleeves.

All longitudinal joints shall be sawed normal to the surface of the pavement with a suitable concrete saw. Construction of longitudinal joints shall be in accordance with the appropriate requirements, as follows:

- i. When the longitudinal joint separates adjacent pavement lanes or slabs that are poured at the same time (full-width construction: Type D joint), sawing of longitudinal joints shall be performed between 4 and 24 hours after the pavement is placed and before any equipment and vehicles are allowed on the pavement. The saw cut shall be to a minimum depth of one-third of the plan depth of pavement; the width shall be 1/8 in. (3 mm), with a tolerance of plus or minus 1/16 in. (2 mm).
- ii. When the longitudinal joint separates adjacent pavement lanes or slabs that are poured separately (lane-at-a-time construction: Type D or E joint), the longitudinal joint shall be sawed. The saw cut shall be to a depth of 1 in. (25 mm), plus 1/4 in. (6 mm); the width shall be 1/8 in. (3 mm) plus or minus 1/16 in. (2 mm).

501.11.2-Transverse Expansion Joints (Type B or Type C joint): The expansion joint filler shall be one piece, continuous from form to form, shaped to the subgrade and to the cross section of concrete. The filler shall be depressed 1/2 in. (13 mm) below the surface of the pavement.

The expansion joint filler shall be held in a vertical position. Finished joints shall not deviate more than 1/4 in. (6 mm) in the horizontal alignment from a straight line at right angles to the centerline of the pavement. No plugs of concrete will be permitted anywhere within the expansion space.

501.11.3-Transverse Contraction Joints: Transverse contraction (Type A) joints shall consist of planes of weakness created by sawing or forming grooves, normal to the grade, in the surface of the pavement as shown on the approved Joint Layout Plan(s). These contraction joint grooves shall be centered, within 1 in. (25 mm) of the mid-length of the dowels, over the coated dowel bars specified.

Unless otherwise specified or authorized, all transverse contraction joint grooves shall be constructed as described, resulting in the dimensions detailed on the approved Joint Layout Plan(s) and at the spacing and locations shown on the Plans.

As soon as feasible after placing the concrete, the contraction joints shall be sawed to the dimensions shown on the approved Joint Layout Plan(s). Sawing of joints shall commence as soon as the concrete has hardened sufficiently to permit sawing without excess raveling, usually 4 to 24 hours. All joints shall be sawed before uncontrolled shrinkage cracking takes place, but no later than 24 hours after placement of concrete. If necessary, sawing operations shall be continuous, through day and night, regardless of weather conditions. In general, all joints should be sawed in sequence. The sawing of any joint shall be omitted if cracking occurs at or near the joint location prior to the time of sawing. Sawing of a joint shall be discontinued when a crack develops ahead of the saw. If extreme conditions exist which make it impractical to prevent erratic cracking by early sawing, the contraction joints shall be formed in the plastic concrete.

All joint repair work shall be done at the Contractor's expense and to the satisfaction of the Engineer.

When formed joints are permitted, they shall be effected by an approved mechanically operated device to the dimensions specified and while the concrete is still in the plastic state.

Random cracking at transverse contraction joints, as described in 501.11.7, shall be sealed with silicone sealant.

501.11.4-Transverse Construction Joints: Transverse construction joints shall be installed when there is an interruption of more than 30 minutes in the concreting operations. No construction joint shall be installed within 10 ft. (3 meters) of an expansion or contraction joint. If sufficient concrete has not been placed to form a slab at least 10 ft. (3 meters) long, the excess concrete back to the last proceeding joint shall be removed.

Construction joints shall be constructed in a manner similar to transverse contraction joints utilizing a Type A joint. The groove shall have the same dimensions as for transverse contraction joints.

501.11.5-Coated Dowel Bars: Coated dowel bars (load transfer reinforcement) shall be used across all transverse Type A joints as shown on the approved Joint Layout Plan(s). Dowels shall be located at mid-depth of the pavement with a tolerance of placement within plus or minus 1 in. (25 mm) of the lateral and vertical positions shown on the approved Joint Layout

Plan(s). Dowels shall be aligned parallel to the centerline and surface of the pavement with a tolerance for such alignments within plus or minus ¼ in. (6 mm) per dowel.

Dowels shall be held in position in the pavement by means of metal supports that remain in the pavement, except as noted. The combination of dowel bars and all the various components of the metal supports at a joint is commonly referred to as the dowel assembly or load transfer unit. Welding of dowels to the supports, to achieve a fixed end condition, shall be performed in accordance with the details shown on the approved Joint Layout Plan(s). For dowel assemblies at contraction and construction joints, welding of dowels to any member of the supports will not be permitted within the middle one-third of the dowel's length. The longitudinal misalignment of one end of a dowel assembly with respect to the other end in achieving a perpendicular alignment with the centerline of the pavement shall not exceed 1 in. (25 mm). Acceptance of a type of dowel assembly by the Division in no way relieves the Contractor of their responsibility for furnishing, as part of the assembly, coated dowel bars that meet the requirements of 709.15, nor does it relieve the Contractor of the Contractor's responsibility for placing and maintaining the assembly in its proper position and alignment during paving operations.

The mechanical implanting method of placing dowels bars is permitted if the contractor can show, by the method outlined below or other approved methods, that the dowel bars can be placed within the required tolerance with no adverse effects to the finished concrete pavement.

Prior to, or on the first day of the paving operation, the Contractor shall use non-destructive testing methods, such as the MIT Scan-2 technique, approved by the Engineer, to confirm dowel placement and alignment.

Dowel bars shall be placed to within 5% tolerance of the depth shown on the plans, and parallel to the traffic lane centerline and top of roadway surface within a tolerance of ¼ inch (6 mm) per 12 inches (300 mm) of dowel bar length.

Suspend paving operations if dowels are installed improperly and dowel alignment does not meet the specified tolerances. Paving operations shall not be resumed until the Contractor demonstrates to the Engineer that the problem has been corrected.

For coated dowel bar types that require a bond breaker, the bond breaking material, prequalified for use with that particular type coating, shall be carefully applied over the entire length of the bar just prior to placement of concrete unless an approved bondbreaker lubricant has been applied in the shop.

The free end of expansion joint dowels utilized in a Type B joint shall be provided with a close fitting metal cap or sleeve equipped with a stop to prevent closing during paving operations. A clearance of 1 in. (25 mm) shall be maintained between the closed end of the cap and the end of the dowel to accommodate future movement of the concrete slab.

501.11.6-Expansion Joints Around Structures: Expansion joints shall be formed by placing pre-molded expansion joint material about all structures and features projecting through, into or against the pavement. Unless otherwise indicated, such joints shall be ½ in. (13 mm) in width.

501.11.7-Random Cracks: Random cracks falling within 3 inches (75 mm) of the center of the transverse contraction joint's dowel bars shall be sawed for the full width, widening and deepening the crack to the dimensions of sawing for transverse contraction joints.

If any random or uncontrolled crack occurs outside 3 inches (75 mm) from a doweled joint, the entire pavement within the lane where such crack occurs shall be removed for the entire 15ft panel between joints.. The dowel assembly or bars, as the case may be, shall be replaced with a new dowel assembly with drilling. The new joint over the dowel assembly shall be initially formed by the use of a removable insert or by sawing. The tie bars shall be replaced with a Modified Type E joint. The above described work shall be done at no additional cost to the Division.

501.11.9-Transverse Joints in Concrete Shoulders: Dowel bars are not required in paved shoulders except where turning traffic may use the shoulders as a lane.

501.14-CURING:

501.14.4-White Pigmented Impervious Membrane:

ADD THE FOLLOWING PARAGRAPH AFTER THE SECOND PARAGRAPH:

For unbonded concrete overlays, the curing compound application rates noted below shall be doubled.

501.16-SEALING JOINTS:

ADD THE FOLLOWING PARAGRAPH TO THE END OF THE SECTION:

Cleaning and sealing of all joints in unbonded concrete overlays is not required unless shown on the Plans.

501.22-METHOD OF MEASUREMENT:

ADD THE FOLLOWING PARAGRAPHS AFTER THE FIRST PARAGRAPH:

When Item 501009-* is specified in the project plans, the quantity of concrete overlay placement to be paid for will be the number of square yards (meters) complete in place and accepted. The width for measurement will be the width of the pavement or overlay shown on the typical cross section of the Plans and additional widening where called for or as otherwise directed in writing by the Engineer. The length will be measured on the surface along the centerline of each roadway and each roadway ramp.

When Item 501011-* is specified in the project plans the quantity of concrete used in concrete overlays to be paid for will be the number of cubic yards (meters) in place and accepted. The Engineer will measure the volume of concrete used in concrete overlays using the Contractor's certified batch tickets or other approved documentation.

501.23-BASIS OF PAYMENT:

501.23.1-General:

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

501.23.1-General: The quantities, determined as provided above, will be paid for at the contract unit prices less adjustments referred to below, which shall constitute full compensation for furnishing and preparing of all materials, including reinforcing steel, transverse and longitudinal joints, expansion joint filler, elastomeric joint seals, silicone sealant, epoxy mortar for joint repair work, polyethylene tape, rope or rod joint back-up material, lubricant-adhesive for elastomeric seals, and dowels or load transfer devices as are required in the Plans; construction of any bond breaker/leveling course, milling existing surface; placing, finishing and curing concrete; and all labor, equipment, tools, field laboratory, supplies and incidentals necessary to complete the work.

501.24-PAY ITEMS:

ADD THE FOLLOWING PAY ITEMS:

ITEM	DESCRIPTION	UNIT
501009-*	"Thickness" UNBONDED PORTLAND CEMENT CONCRETE OVERLAY	Square Yard (Meter)
501011-*	UNBONDED PORTLAND CEMENT CONCRETE OVERLAY	Cubic Yard (Meter)

* Sequence number

**SECTION 506
CONCRETE PAVEMENT REPAIR**

DELETE ENTIRE SECTION AND REPLACE WITH THE FOLLOWING:

506.1-DESCRIPTION:

This work consists of the removal and replacement of deteriorated concrete pavement and patches, and replacing subbase material where required, at locations as shown on plans or as specified by the Engineer.

The following is a description of each patch type:

- i. **Jointed Concrete Pavement Patch, Type I:**
Patching shall consist of full depth, full lane width concrete pavement repairs equal to or greater than 6 feet (1.8 meters) in length. Type I patches shall be constructed in accordance with the Concrete Repair Details in the plans.

- ii. **Jointed Concrete Pavement Patch, Type II:**
Patching shall consist of partial depth concrete pavement repairs that extend no deeper than one-third the slab thickness and extend no more than one-half the lane width. Type II patches shall be constructed in accordance with the Concrete Repair Details in the plans.

506.2-MATERIALS:

Materials shall meet the requirements of section 501 or 601, and as follows:

MATERIAL	SECTION OR SUBSECTION
Subbase	307
Portland Cement Concrete	501 or 601
Epoxy-Coated Dowel Bars	709.15
Tie Bars and Hook Bolts	709.1
Joint Sealer	708.3, 708.4
Accelerating Admixtures	707.13
Curing Materials	707.6-707.10

An approved epoxy grout shall be used to firmly anchor dowel bars in 30 minutes. Bond breaker material shall be supplied from an approved source. Acceptable bond-breaking materials include white pigmented curing compound.

506.3-PROPORTIONING:

Portland cement concrete for patching concrete pavement shall meet the requirements of Section 501 or Class B concrete as specified in Section 601, except that it shall be shown by compressive strength tests that the concrete mix shall attain 2,000 psi (13.8 Mpa) prior to the time at which the pavement will be opened to traffic. Prior to the start of work, the Contractor shall submit the mix proportions and recent compressive strength test data for the specified age at which the concrete is to be opened to traffic.

506.4-TESTING:

All testing shall be in accordance with section 501. The Contractor shall fabricate a minimum of nine field cured compressive strength cylinders for each 24 hour period of operation. These nine field cured cylinders shall be cured in a temperature and moisture condition as close as possible to that of the concrete in the repair area. When the average strength of three of these cylinders, representing the concrete placed, indicate that the concrete has attained the required strength for opening to traffic, that concrete may be put into service. These cylinders shall represent concrete produced from the batch from which they were fabricated and, if applicable, concrete from previous batches also. These cylinders will not represent any concrete which was placed after the time that they were fabricated.

506.5-EQUIPMENT AND TOOLS:

Equipment and tools shall be in accordance with section 501 unless noted otherwise. Saw cutting equipment shall be capable of sawing neat vertical faces along the patch boundaries. The use of a carbide-toothed wheel saw shall not be permitted for sawing the patch boundaries. A carbide-tipped wheel saw may be used for additional saw cuts provided that a minimum 3-inch (75 mm) clearance from the sawed boundary is maintained.

506.6-CONSTRUCTION METHODS:

506.6.1-Removal of Existing Pavement: Designated defective pavement shall be removed full depth, and undisturbed portions of the existing pavement adjacent to the area to be patched shall be left with straight vertical sides.

The existing pavement to be removed shall be sawed full depth along the transverse and longitudinal boundaries, including the lane and shoulder/lane joints as shown on the plans or as directed by the Engineer. Additional saw cuts inside the patch boundaries will be permitted to facilitate the concrete removal operation.

Concrete sawn full depth to be removed shall be lifted out by means of chains, lift-pins, or other approved devices. The breaking of concrete in-place shall not be permitted. During the removal operations, utmost care shall be exercised to minimize disturbance and damage to the base material, and the adjacent pavement and shoulder.

506.6.2-Conditioning Existing Subbase: Prior to placing concrete in the repair area, any subbase material that is disturbed below the desired level of cleanout shall be removed and the patch area compacted to the satisfaction of the Engineer. Unsuitable subbase material, concrete, reinforcing steel, and any other debris shall become property of the Contractor and shall be legally disposed. The Contractor shall replace the removed subbase material with concrete integral to pavement replacement up to a maximum 1-inch (25 mm) depth. In the event that soft areas are encountered in the subbase or subgrade, the Engineer may require replacement of subbase and subgrade in accordance with section 307 subbase material and installation of underdrains. When subbase or subgrade material is replaced, it shall be brought to grade and compacted to the satisfaction of the Engineer. The cost of installation and method of installation of underdrains shall be as per section 606.

506.6.3-Placing Concrete: Unless otherwise approved by the Engineer, all excavated areas shall be patched the same day that they are excavated. The excavated area shall be thoroughly cleaned of loose material and debris and moistened prior to the placement of concrete.

Existing pavements shall not be removed if such removal will result in concrete being placed when the ambient air temperature is below 32° F, unless approved by the Engineer. The concrete temperature at the time of placement shall not be less than 70° F and not more than 95° F, unless approved by the Engineer.

Concrete shall be deposited in the excavated area, and the free fall shall not be more than 3 feet (1 m). If the concrete does not fall into its final position in the patch, it shall be moved by means of shovels; raking is prohibited. The concrete shall be worked with tampers, spades, or other tools to completely fill the patch area. Maximum effort will be used to ensure that the area beneath the existing concrete pavement is completely filled. Internal vibration shall be used.

Following the placing of the concrete, the surface will be struck off to a finished grade and floated to a smooth finish. Finishing of the plastic concrete shall conform to the requirements of Section 501.12 of the Specifications, except that the final concrete surface shall be textured similar to that of the adjoining pavement.

506.6.4-Straightedge Checking and Surface Correction: During finishing operations, deviations in adjacent lanes which are also to be repaired shall not be transferred to the new construction. The Contractor shall furnish and use straightedges to check the surface tolerance. For patches 10 feet (3 m) or more in length, a 10 foot (3 m) straightedge shall be used. Shorter straightedges shall be used for patches less than 10 feet (3 m) in length.

The minimum length straightedge shall be 6 feet (1.8 m). Section 501.12.6 shall govern except that the shorter straightedges shall be used for shorter patches.

506.6.5-Curing: Immediately after straight edging and texturing, the concrete shall be cured in accordance with Section 501.14. Where early opening to traffic is required, insulation mats or blankets may be used over the repairs during curing in order to accelerate strength gain.

506.6.6-Sealing Joints: When patching two lanes simultaneously, the longitudinal joint shall be reestablished by sawing. Joints shall be sealed with silicone unless otherwise approved by the Engineer. Joint sealing shall be done in accordance with Sections 509 and 510.

506.6.7-Repair of Adjacent Shoulders: Within 24 hours after completion of a patch area, any adjacent shoulders damaged during pavement repair operations shall be reconstructed in accordance with the requirements of the applicable section of the specifications to match the finished shoulder grade and to the satisfaction of the Engineer. In the event traffic is to be permitted on the patch area prior to reconstruction of the shoulder, the Contractor shall first make such temporary repair to the shoulder as is necessary to avoid any hazardous condition.

506.6.8-Specific Construction Methods: Construction methods specific to each repair type are noted in the following sections.

506.6.8.1-Type I Repairs: Where the existing joint dowel assembly is to be removed, the existing concrete shall be saw cut full depth and removed a minimum of 1 foot (300 mm) on either side of existing transverse joints. Minimum length of removal shall be 6 feet (1.8 m) in accordance with that shown in the WVDOH Concrete Repair Details.

Oversawing into the adjacent slabs or shoulder shall be kept to the minimum amount necessary to ensure that full depth cuts in the corners have been achieved. All oversawing shall be cleaned and filled with joint sealant.

Any areas damaged during concrete sawing and removal operations shall be repaired to the satisfaction of the Engineer by extending the patch boundary or repairing spalls at the Contractor's expense. Spalls greater than ¼ inch (6 mm) wide and 2 inches (50 mm) long and more than ½ inch (13 mm) deep below the pavement surface shall be repaired using an approved epoxy mortar.

An approved bond breaking material shall be placed at the longitudinal joint for Type I patches as shown in WVDOH Concrete Repair Details.

Where dowels are required, holes slightly larger than the diameter of the dowels shall be drilled 9 inches (225 mm) into the face of the existing slab starting 6 - 12 inches (150 - 300 mm) from either edge and then on 12 inch (300 mm) centers. There shall be four dowels placed in from each pavement edge for a total of eight per joint. The holes shall be located at a depth as shown in the WVDOH Concrete Repair Details. The dowels shall be carefully aligned (within ¼ inch (6 mm)) with the direction of the pavement and parallel to the plane of the surface. An approved quick setting, non-

shrinking mortar or an approved high viscosity epoxy shall be used to anchor the dowels in the holes. The holes shall be completely filled around the dowels so as to minimize vertical movement of the dowels and ensure that the dowels are permanently fastened to the existing concrete. The epoxy or grout is to be put into the hole in sufficient quantity so that when the bar is inserted, the material completely fills the annular space around the bar. A grout retention ring shall be used as shown in the WVDOH Concrete Repair Details.

The surface edges of all patches shall be tooled, formed and/or sawed, and cleaned to result in a properly dimensioned reservoir for sealant. All transverse and longitudinal joints at pavement repair locations shall be filled with silicone in accordance with manufacturer's recommendations unless otherwise approved by the Engineer.

506.6.8.2-Type II Repairs: Partial depth patches shall be sawed a minimum depth of 2 inches (50 mm) around the perimeter of the patch area to provide a vertical face at the edges. Concrete within the patching area shall be broken out with a pneumatic hammer not heavier than a 35-pound class or by other methods approved by the Engineer. Edge spalls greater than ¼ inch (6 mm) wide and 2 inches (50 mm) long and more than ½ inch (50 mm) deep below the pavement surface shall be repaired using an approved epoxy mortar. The area of failure shall be removed by equipment that will not damage the adjacent sound pavement. The exposed faces of the concrete shall be free of loose particles, oil, dust, and other contaminants before placement of patch material. Prior to placement of the concrete patch, all exposed concrete faces within the patched area shall be coated with an approved epoxy bonding compound per the manufacturer's recommendations. All residues shall be removed just prior to placement of the concrete bonding agent.

506.7-RIDE ACCEPTANCE:

As soon as the concrete has hardened sufficiently, the pavement surface shall be tested with a 10 foot (3 m) straightedge. The straightedge shall be placed in successive positions parallel to the road centerline, matching existing wheel paths. Areas showing deviations (either high or low) of more than ¼ inch (6 mm) in 10 feet (3 m) shall be marked and corrected down with approved grinding equipment to an elevation where the surface deviations will not be more than ¼ inch in 10 feet (3 m).

In the event that the deviation cannot be corrected to ¼ inch (6 mm) or less (either high or low) in 10 feet (3 m), the areas shall be removed and replaced at the discretion of the Engineer and at the Contractor's expense. All areas or sections so removed shall not be less than 6 feet (1.8 m) in length or less than full width of the traffic lane involved. Any remaining portion of the slab adjacent to the joints that is less than 6 feet (1.8 m) in length shall also be removed and replaced. Where concrete repairs are made that are to be overlaid, the smoothness criteria is waived for the concrete repair.

506.8-METHOD OF MEASUREMENT:

The quantity of concrete pavement repair to be paid for will be the number of square yards (meters) complete in place and accepted.

506.9-BASIS OF PAYMENT:

The quantity of concrete pavement repair, determined as provided above, will be paid for at the contract unit price and shall constitute full compensation for the furnishing, hauling, and placing of all materials, saw cutting pavement to the required depth, the removal and disposal of old concrete, preparing of sublayer, furnishing and installing steel dowels, furnishing and installing reinforcing steel as specified, furnishing, placing, finishing, and curing the concrete, cleaning and sealing joints, patch area protection, and for all other materials, labor, tools, equipment, and incidentals necessary to complete the item.

506.10-PAY ITEM:

ITEM	DESCRIPTION	UNIT
506001-*	CONCRETE PAVEMENT REPAIR, "Type"	Square Yard (Meter)
506003-*	REMOVE AND REPLACE EXISTING AGGREGATE BASE COURSE	Cubic Yard (Meter)

* Sequence number

** Type shall be either Type I or Type II repairs as described in the provision.

**SECTION 514
ROLLER COMPACTED CONCRETE**

514.1-DESCRIPTION:

Roller Compacted Concrete (RCC) consists of aggregate, Portland cement and possibly other supplementary cementitious materials (fly ash, slag), and water. RCC is proportioned, mixed, placed, compacted, and cured in accordance with these specifications. Ensure that the RCC conforms to the lines, grades, thickness, and typical cross section shown in the plans or otherwise established by the WVDOH. When used as base course, it shall be constructed as shown in the plans.

514.2-MATERIALS:

Materials shall meet the requirements specified in the following Sections or Subsections of Division 700:

MATERIAL	SECTION OR SUBSECTION
Portland Cement	701.1, 701.3
*Fine Aggregate	702.1
Coarse Aggregate	703.1-4
Pozzolanic Additives	707.4
Water	715.7
Water Reducing and Retarding Admixtures	707.2
Curing Materials	707.6-707.10

* NOTE: The use of limestone as fine aggregate will not be permitted

Shipping and storage of Cement and Pozzolanic Additives: Cement and pozzolanic additives shall be shipped and stored as outlined in Section 501.2.

514.2.1-Material Requirements:

Aggregates: Use no aggregate where the plasticity index of the aggregate exceeds 5. Aggregates may be a blend of fine and coarse aggregates. Use well-graded aggregate without gradation gaps and conforming to the following gradation:

Sieve Size	% Passing by Weight
1 inch	100
¾ inch	90-100
½ inch	70-100
3/8 inch	60-85
#4	40-60
#16	20-40
#100	6-18
#200	2-8

During production, the Contractor shall perform gradations on a daily basis, to verify that the aggregate gradation meets the above requirements. Those test results shall be submitted to the Engineer within 72 (seventy-two) hours.

514.3-PROPORTIONING:

514.3.1-RCC Mix Design Requirements: At least 45 days prior to the start of construction, the Contractor shall submit to the Engineer for approval the proportion of materials to be used which will result in a workable RCC mix. The Engineer will review these proportions within 14 (fourteen) Calendar Days and, if the mix design appears satisfactory to the Engineer, the Contractor shall prepare and test a trial batch mixture and representative test slab at least 100 ft in length to verify that the design criteria for strength are met. Perform batch mixture preparation and testing in the presence of representatives of the Engineer. Construction, using RCC, shall not begin until an approved mix design has been obtained.

514.3.2-Design Compressive Strength: A mix design shall be used which demonstrates a minimum compressive strength of 4000 psi within 28 days. Compressive strength specimens shall be prepared in accordance with ASTM C 1435 and tested in accordance with AASHTO T 22. At least two sets of three cylinders shall be produced, with one set being tested at 4 days and the other at 28 days. The compressive strength at a particular age shall be determined as the average of the three specimens. If one individual result is much lower or much higher than the other two due to defects in the specimen as outlined in section 601.4.4, that value shall be discarded.

514.4-TESTING:

501.4.1-Compressive Strength Tests for Acceptance: For every 1500 cubic yards or fraction thereof, of mix produced, and at least once for each day of production, prepare at least three sets of test specimens in accordance with ASTM C 1435 under the direct observation of the Engineer. A set of specimens consists of three cylinders. Cure and transport the specimens to the Contractor's WVDOH approved laboratory in accordance with AASHTO T23. Test one set of these cylinders for compressive strength in accordance with AASHTO T22 at each of the following ages under the direct observation of the Engineer: 3 days, 7 days, and 28 days. The compressive strength of each set of cylinders shall be the average of the three specimens except that if one specimen shows evidence of improper sampling, molding, or testing, it shall be discarded and the remaining two strengths averaged. Should more than one specimen representing a given test show definite defects due to improper sampling, molding, or testing, the entire test shall be discarded.

If the compressive strength of the specimens, measured at 3 days, indicates that the 28-day compressive strength will be less than 3500 psi, investigate the potential causes of the low strengths and report to the Engineer within 24 hours. If the compressive strength of the specimens, measured at 3 days, indicates 28-day compressive strengths will be less than 3200 psi, immediately stop production and notify the Engineer. Do not resume

production until the cause of the discrepancy has been determined to the satisfaction of the Engineer. The Engineer may adjust compressive strength targets at 3 days as production continues based on field experience.

514.5-EQUIPMENT AND TOOLS:

Construct roller compacted concrete with any combination of equipment that will produce a completed pavement meeting the requirements for mixing, transporting, placing, compacting, finishing, and curing as provided in this specification.

514.5.1-Field Laboratory: RCC shall be supplied by a plant which has been certified by the Division as meeting all requirements of the governing Specifications and as having the facilities necessary to ascertain and control the quality of the product in accordance therewith. A testing facility or laboratory, meeting the requirements of Section 501.5.1 shall be provided by the Contractor.

514.5.2 - Mixing Plant:

514.5.2.1-General: Unless approved measures are taken to delay the setting time of the RCC, the mixing plant shall be located within a thirty-minute haul time from the point of RCC placement. Use only plants capable of producing an RCC pavement mixture in the proportions defined by the final approved mix design and within the specified tolerances. The capacity of the plant must be sufficient to produce a uniform mixture at a rate compatible with the placement equipment. The estimated production rate of the Plant shall be noted in the Contractor's Quality Control plan. If the plant is unable to produce material at a rate adequate to prevent unnecessary cold joints and frequent paver stoppages, the Engineer may halt production until such time that a plant of appropriate capacity is used. The plant shall be inspected and approved by WVDOH District Materials Personnel prior to production of material under these specifications.

514.5.2.2-Pugmill Plant: Use only pugmill plants of the central plant type with a twin-shaft pugmill mixer, capable of batch or continuous mixing, equipped with synchronized metering devices and feeders to maintain the correct proportions of aggregate, cement, pozzolan, and water. These plants shall meet the requirements of AASHTO M156. Other pugmill plant requirements are as follows:

514.5.2.2.1-Aggregate Storage: If previously blended aggregate is furnished, storage may be in a stockpile from which it is fed directly to a conveyor feeding the mixer. If aggregate is furnished in two size groups, follow proper stockpiling techniques in accordance with section 501.7 to ensure aggregate separation.

514.5.2.2.2-Aggregate Feed Rate: Use aggregate bins with a feed rate controlled by a variable speed belt, or an operable gate calibrated to accurately deliver any specified quantity of material. If two aggregate size stockpile sources are used, the feed rate from each bin must be readily adjustable to change aggregate proportions, when required. Feed rate controls must maintain the established proportions of aggregate from each stockpile bin when the combined aggregate delivery is increased or decreased.

514.5.2.2.3-Plant Scales: Plant scales, if utilized, for any weigh box or hopper must comply with Section 601.5.2.3.

514.5.2.2.4-Cement and Pozzolan Material Storage: Supply separate and independent storage silos for Portland cement and pozzolan. At plants with two or more silos in which different types of cement or cementitious materials are stored, ensure that each silo has a sign at each fill inlet to reduce the potential for loading errors. Make the sign from a durable material, with minimum two-inch high by ¼-inch wide letters that are raised, indented, or cut. Ensure that the sign clearly identifies the material that is in the silo and may be easily read even when completely coated with dust.

514.5.2.2.5-Portland Cement and Pozzolan: If using Portland cement and pozzolan (such as fly ash or slag), employ blending equipment acceptable to the WVDOH and demonstrate, with a testing plan, the ability to successfully produce a uniform blended material meeting the mix design requirements. Perform testing on at least a daily basis to ensure both uniformity and proper quantities.

514.5.2.2.6-Cement and Pozzolan Feed Unit: Provide a satisfactory means of dispensing Portland cement and pozzolan, volumetrically or by weight, to ensure a uniform and accurate quantity of cementitious material enters the mixer.

514.5.2.2.7-Water Control Unit: Use a water control unit capable of measuring the required amount of water for the approved mix by weight or volume. Ensure that the unit is equipped with an accurate metering device. Vary the amount of water to be used only with the approval of the District Engineer.

514.5.2.2.8-Gob Hopper: For continuous operating pugmills, provide a gob hopper attached to the end of the final discharge belt to temporarily hold the RCC discharge in order to allow the plant to operate continuously.

514.5.2.3-Rotary Drum Mixer: Shall meet the requirements of Section 501.5.3 and shall provide a rotary drum batch mixer capable of producing a homogeneous mixture, uniform in color, and having all coarse aggregate

coated with mortar. Equip the mixer with batching equipment to meet the following requirements:

514.5.2.3.1-Weighing Equipment: Measure the amounts of cement, pozzolan, and aggregate entering into each batch of RCC by direct weighing equipment. Use only weighing equipment that is readily adjustable in order to compensate for the moisture content of the aggregate or to change the proportionate batch weights. Include a visible dial or equally suitable device that will accurately register the scale load from zero to full capacity. The cement and pozzolan may be weighed separately or cumulatively in the same hopper on the same scale, provided the cement is weighed first.

514.5.2.3.2-Weigh Hoppers: Use only bulk cement and pozzolan weigh hoppers that are equipped with vibrators to operate automatically and continuously while weighing hoppers are being dumped. Ensure that the weigh hopper has sufficient capacity to hold not less than 10 percent in excess of the cementitious material required for one batch.

514.5.2.3.3-Water Metering: Measure the amount of water entering each batch of RCC by weight or volume. Use only equipment capable of measuring the water to within a tolerance of plus or minus one percent and equipped with an accurate gauge or dial measuring device. Vary the amount of water to be used only with the approval of the District Engineer. During batching, admit water to the mixer only through the water measuring device and then only at the time of charging.

514.5.2.3.4-Mixing Time: Use only drum mixers equipped with an accurate clock or timing device, capable of being locked, for visibly indicating the time of mixing after all the materials, including the water, are in the mixer.

514.5.2.3.5-Recharging: Discharge all material in the drum before recharging. Ensure that the volume of mixed material per batch does not exceed the manufacturer's rated capacity of the mixer.

514.5.3-Paver: Place RCC with a high-density asphalt-type paver subject to approval by the District Engineer. Use only pavers equipped with compacting devices capable of producing an RCC pavement with a minimum of 90 percent of the maximum density in accordance with AASHTO T 180, Method D prior to any additional compaction. Ensure that the paver is of suitable weight and stability to spread and finish the RCC material, without segregation, to the required thickness, smoothness, surface texture, cross-section, and grade.

514.5.4-Compactors: Use self-propelled steel drum vibratory rollers having a minimum static weight of 10 tons for primary compaction. For final compaction, use either a steel drum roller, operated in a static mode, or a

rubber-tired roller of equal or greater weight. Only use walk-behind vibratory rollers or plate tampers for compacting areas inaccessible to large rollers.

514.5.5-Haul Trucks: Use trucks for hauling the RCC material from the plant to the paver with covers available to protect the material from inclement weather. To ensure adequate and continuous supply of RCC material to the paver, have a sufficient number of trucks. If the number of trucks is inadequate to prevent frequent starts and stops of the paver, cease production until additional trucks are obtained.

514.5.6-Water Trucks: Keep at least one water truck, or other similar equipment, on-site and available for use throughout the paving and curing process. Equip such equipment with a spreader pipe containing fog spray nozzles capable of evenly applying a fine spray of water to the surface of the RCC without damaging the final surface.

514.5.7-Inspection of Equipment: Before start-up, the Contractor's equipment will be carefully inspected. Should any of the equipment fail to operate properly, cease work until the deficiencies are corrected.

514.5.8-Access for Inspection and Calibration: Provide the District Engineer or WVDOH District Materials Inspector access at all times for any plant, equipment, or machinery to be used in order to check calibration, scales, controls, or operating adjustments.

514.6-PREPARATION OF GRADE AND CONDITIONING OF SUBGRADE OR BASE:

Before the RCC processing begins, prepare the subgrade in accordance with Section 228 of the WVDOH Standard Specifications.

514.7-HANDLING, MEASURING, AND BATCHING MATERIALS:

Handling, measuring, and batching of materials shall be in accordance with Section 501.7, except that volumetric batching shall not be permitted.

514.8-MIXING RCC:

514.8.1-Mixing Process: Use the same mixture for the entire project unless otherwise stated in the project documents. If, during production, the source of Portland cement, pozzolan, or aggregates is changed, then suspend production and submit a new mix design to the Engineer for approval. Do not exceed the manufacturer's rated capacity for dry concrete mixtures in the mixing chamber. Keep the sides of the mixer and mixer blades free of hardened RCC or other buildups. Routinely check mixer blades for wear and replace if wear is sufficient to cause inadequate mixing.

514.8.2-Mixing Time: Use a mixing time adequate to ensure a thorough and complete mixing of all materials. Do not allow the mixing time, after all materials including water are in the mixer, to be less than 1½ minutes for one cubic yard and 20 seconds for each additional cubic yard.

514.8.3-Plant Calibration: Prior to commencement of RCC production, carry out a complete and comprehensive calibration of the plant in accordance with Section 501.5.2. Provide all scales, containers, and other items necessary to complete the calibration. After completion of the initial calibration, calibrate the plant periodically as directed by the Engineer. Plants listed on WVDOH approved list at the time of RCC production are exempt from this requirement, although the WVDOH reserves the right to require additional calibration if variation in mixture quantities are suspected.

514.8.4-Daily Reports: Supply daily plant records of production and quantities of materials used that day to the Engineer. These records may be used as a check on plant calibration.

514.8.5-Transportation: Transport the RCC pavement material from the plant to the areas to be paved in dump trucks equipped with retractable protective covers for protection from rain or excessive evaporation. Ensure that the trucks are dumped clean with no buildup or hanging of RCC material in the corners. Have the dump trucks deposit the RCC material directly into the hopper of the paver or into a secondary material distribution system that deposits the material into the paver hopper. Dump truck delivery must be timed and scheduled so that RCC material is spread and compacted within the specified time limits.

514.9-PLACING RCC:

514.9.1-Subbase Condition: Prior to RCC placement, ensure that the surface of the subbase is clean and free of foreign material, ponded water, and frost. Ensure that the subbase is uniformly moist at the time of RCC placement. If sprinkling of water is required to remoisten certain areas, ensure that the method of sprinkling will not form mud or pools of freestanding water. Correct soft or yielding subbase areas prior to placement of RCC as specified in Section 6.1 above.

514.9.2-Adverse Weather Conditions:

514.9.2.1-Cold Weather Precautions: Employ cold weather precautions as detailed in Section 601.9.1 of the Standard Specifications.

514.9.2.2-Hot Weather Precautions: Employ hot weather precautions as detailed in Section 601.9.2 of the Standard Specification. During periods of hot weather or windy conditions, take special precautions to minimize

moisture loss due to evaporation. Cooling of aggregate stockpiles by shading or the use of a fine mist may be required. Protective covers may be required on dump trucks. Keep the surface of the newly placed RCC pavement continuously moist.

514.9.2.3-Rain Limitations: Conduct no placement of RCC pavement during rain conditions sufficient to be detrimental to the finished product. Placement may continue during light rain or mists provided the surface of the RCC pavement is not eroded or damaged in any way. Use dump truck covers during these periods. The WVDOH may terminate paving at any time when, in the WVDOH judgment, the rain is detrimental to the finished product.

514.9.3-Paver Requirements: Place all RCC with an approved paver as specified in Section 514.5.3, and also meeting the requirements of this Section.

514.9.3.1-Filling the Paver: Do not allow the quantity of RCC material in the paver to approach empty between loads. Maintain the material above the auger at all times during paving.

514.9.3.2-Stopping the Paver: Ensure that the paver proceeds in a steady, continuous operation with minimal starts and stops, except to begin a new lane. Maximum paver speed during laydown is 10 feet per minute. Higher paver speeds may be allowed at the discretion of the WVDOH if the higher speeds may be obtained without distress to the final product or cause additional starts and stops.

514.9.3.3-Surface Condition: Ensure that the surface of the RCC pavement is smooth, uniform, and continuous without excessive tears, ridges, or aggregate segregation once it leaves the paver.

514.9.4-Inaccessible Areas: Pave all areas inaccessible to either roller or paver with cast-in-place concrete meeting the requirements of Section 501.

514.9.5-Adjacent Lane Pavement: Place adjacent paving lanes within 60 minutes. If more than 60 minutes elapses between placement of adjacent lanes, the vertical joint must be considered a cold joint and prepared in accordance with Section 514.11. At the discretion of the Engineer, this time may be increased or decreased depending on ambient conditions of temperature, wind, and humidity. Multiple pavers may be used in tandem to reduce the occurrence of cold joints.

514.9.6-Hand Spreading: Broadcasting or fanning the RCC material across areas being compacted is not permissible. Such additions of materials may only be done immediately behind the paver and before any compaction

has taken place. Any segregated coarse aggregate shall be removed from the surface before rolling.

514.9.7-Segregation: If segregation occurs in the RCC during paving operations, placement shall cease until the cause is determined and corrected to the satisfaction of the Engineer. If the segregation is judged by the Engineer to be severe, remove and replace the segregated area at no additional cost to the Department.

514.10-COMPACTION:

514.10.1-Time to Compaction Start: Ensure that compaction begins with the placement process and is completed within 60 minutes of the start of the mixing at the plant. The time may be increased or decreased at the discretion of the WVDOH depending on ambient conditions of temperature and humidity. Do not permit delays in rolling unless approved by the Engineer. Plan operations and supply sufficient equipment to ensure that these criteria are met.

514.10.2-Rolling: Determine the sequence and number of passes by vibratory and non-vibratory rollers to obtain the specified density and surface finish. Only operate rollers in the vibratory mode while in motion. Rubber-tire rollers may be used for final compaction. Use additional rollers if specific density requirements are not obtained or if placing operations get ahead of the rolling operations.

514.10.3-Rolling Longitudinal and Transverse Joints: Do not operate the roller within 2 feet of the edge of a freshly placed lane until the adjacent lane is placed. Then, roll both edges of the two lanes together within the allowable time. If a cold joint is planned, then roll the complete lane and follow cold joint procedures as specified in Section 514.11.

514.10.4-Inaccessible Areas: Compact areas inaccessible to large rollers using walk-behind rollers or hand tampers.

514.10.5-Density Requirements: Field density tests will be performed in accordance with Section 717.3 as soon as possible, but no later than 30 minutes after the completion of the rolling. Only wet density is used for evaluation. The required minimum density is 98 percent of the maximum laboratory density obtained according to AASHTO T 180 (Method D). The in-place density and moisture content may be determined with a nuclear moisture-density gauge. The gauge will be calibrated for moisture content at the beginning of the work and at any time during the work. RCC properly placed and compacted, but not meeting the density requirements, shall be cored and tested at the Contractor's expense. If the tested area achieves 28-day design strength, it will be paid at the full unit price. If the tested area

indicates strength less than 3500 psi but greater than 3150 psi, payment will be made as follows:

Compressive Strength (psi)	Price Reduction (percent of unit bid price)
3300-3499	5
3150	15

If the cores indicate strengths less than 3150 psi at 28 days or longer, the Engineer will evaluate the results and may reject the affected area and require removal and replacement or elect to pay at a reduced rate.

514.11-JOINTS:

514.11.1-Fresh Vertical Joints: A joint is considered a fresh joint when an adjacent RCC lane is placed within 60 minutes of placing the previous lane or as specified by the Engineer based on ambient conditions. Fresh joints do not require special treatment.

514.11.2-Cold Vertical Joints: Any planned or unplanned construction joints that do not qualify as fresh joints are considered cold joints. Prior to placing fresh RCC mixture against a compacted cold vertical joint, thoroughly clean the cold joint of loose or foreign material. Wet the vertical joint face and maintain it in a moist condition immediately prior to placement of the adjacent lane.

514.11.2.1-Sawing Cold Vertical Joints: For uncompacted surfaces or slopes more than 15 degrees from the vertical, cut the joint vertically for the full depth. Within 2 hours of final compaction, the edge of a cold joint may be cut with approved mechanical equipment. For edges cut after 2 hours, sawcut to the full depth of the pavement. Demonstrate any modification or substitution of the sawcutting procedure to the WVDOH for approval prior to use. In no case allow cutting of the edge to cause raveling or tearing of the surface. Moisten the cut edge immediately prior to placement of the adjacent lane.

514.11.3-RCC Pavement Joints at Structures: Line structures such as manholes, valves, or concrete curb and gutter with joint filler as defined in Section 708 of the Standard Specifications.

514.11.4-Control Joints: Construct transverse contraction joints in the RCC pavement by sawing. At the option of the Contractor, soft-cut or green-cut saws may be utilized as soon as possible behind the rolling operation and set to manufacturer's recommendations. Conventional cut saws must be used as soon as the sawing operation will not result in raveling or other damage to the RCC pavement, but not more than 18 hours after RCC placement. Cut all

joints to 1/4 the depth of the RCC pavement to a single saw blade width. Joints should be spaced at intervals equal to 24 times the nominal pavement thickness unless otherwise indicated on the Plans or directed by the WVDOH. (For example, for an 8-inch RCC pavement, cut joints at 16-foot intervals.)

514.12-FINISHING:

Ensure that the finished surface of the RCC pavement, when tested with a 10-foot straightedge or crown surface template, does not vary from the straightedge or template by more than 1/4 inch at any one point and shall be within 5/8 inch of the specified finished grade. When surface irregularities are outside these tolerances, or other smoothness requirements specified in the plans, diamond-grind the surface to meet the tolerance at no additional cost to the WVDOH.

514.13-CURING:

Immediately after final rolling and compaction testing, keep the surface of the RCC pavement continuously moist until an approved curing compound, a suitable prime coat, or a layer of asphalt concrete is applied or for 72 hours after placement, whichever comes first.

During the curing period, the surface temperature of the RCC shall not be allowed to fall below freezing. The Contractor shall be responsible for the quality of the RCC placed and cured during cold weather. Any RCC injured by frost action shall be removed and replaced at the Contractor's expense.

514.13.1-Water Cure: Apply water cure by water trucks equipped with fog spray nozzles, soaking hoses, sprinkling system, or other means such that a uniform moist condition on the surface of the RCC is ensured. Apply this moisture in a manner that will not erode or damage the surface of the finished RCC pavement.

514.13.2-Curing Compound: Do not use curing compounds when the RCC material is to be promptly covered with asphalt. Apply curing compound as indicated in Section 707.9 of the Standard Specifications, except that the minimum rate of curing compound application is 0.09 gallons per square yard (11 square yards per gallon) unless a higher rate is specified by the curing compound manufacturer.

514.14-OPENING TO TRAFFIC:

Protect the RCC from vehicular traffic during the curing period. Completed portions of the RCC pavement may be opened to automotive and light truck traffic as soon as the strength is sufficient to prevent visible damage to the RCC. The pavement may be opened to unrestricted traffic after 12 hours. However, if the temperature drops below 40° F, then the period of time the temperature is below 40° F will be added to the minimum time to opening. Temperature will be based on the temperatures recorded by the WVDOH Inspector.

514.15-MAINTENANCE:

Maintain the RCC pavement in good condition until all work is completed and accepted. Perform such maintenance at no additional cost to the Engineer.

514.16-THICKNESS:

Provide and operate equipment capable of extracting a small (approximately 1 inch diameter or greater) core to determine the pavement thickness. Extract samples in the presence of the Engineer. Repair the core holes using concrete meeting the requirements of Section 501. Rod and neatly strike off the repair material.

514.16.1-Tolerance in pavement thickness: The procedure for sampling and determining the thickness of the completed RCC shall be in accordance with Section 501.19.

514.17-METHOD OF MEASUREMENT:

The quantity of RCC placement to be paid for will be the number of square yards (meters) complete in place and accepted. The width for measurement will be the width of the pavement or overlay shown on the typical cross section of the Plans and additional widening where called for or as otherwise directed in writing by the Engineer. The length will be measured on the surface along the centerline of the roadway or roadway ramp. Construction of control joints will not be measured separately and no direct payment will be made for this work.

514.18-BASIS OF PAYMENT:

The quantities, determined as provided above, will be paid for at the contract unit prices less adjustments referred to below, which shall constitute full compensation for furnishing and preparing of all materials, equipment, tools, labor, and incidentals necessary to satisfactorily complete the work. Pavement that is deficient in thickness, but is permitted to be left in place, will be paid at the reduced unit price as provided in Section 501.23. No compensation will be allowed for the materials or labor involved in the removal of defective material.

501.19-PAY ITEM:

ITEM	DESCRIPTION	UNIT
514001-*	"Thickness" ROLLER COMPACTED CONCRETE	Square Yard (Meter)

* Sequence number

**DIVISION 600
INCIDENTAL CONSTRUCTION**

**SECTION 601
STRUCTURAL CONCRETE**

601.3.2.3-Yield:

DELETE THE THIRD PARAGRAPH IN THE SECTION AND REPLACE WITH THE FOLLOWING:

During the progress of the work, the actual yield shall be verified at the frequency noted in MP 601.03.50; and, if the yield, based on a single unit weight determination, should differ from the theoretical yield by more than plus or minus two percent, two additional unit weight determinations shall be made, and the average of the three determinations shall be considered the unit weight of the concrete. The actual yield shall be determined from that average unit weight, and the design mix shall be adjusted as required to correct the actual yield to correspond to the theoretical yield.

601.3.2.4-Total Solids \bar{A} :

601.4-TESTING:

601.4.1-Sampling and Testing Methods:

DELETE THE LAST TWO PARAGRAPHS FROM THE SECTION:

ADD THE FOLLOWING LINE AT THE END OF THE TABLE:

Rapid Chloride Permeability Test	AASHTO T 277
----------------------------------	--------------

601.4.2-Contractor's Quality Control:

INSERT THE FOLLOWING PARAGRAPH AT THE END OF THE SECTION:

The Contractor shall provide a copy of the quality control test results to the Supplier of the concrete which was tested within 48 hours of the completion of the test.

601.4.5-Tests for permeability acceptance:

DELETE THE HEADING AND THE FIRST SENTENCE OF THE FIRST PARAGRAPH AND REPLACE WITH THE FOLLOWING:

601.4.5-Tests for permeability acceptance of Class H concrete: The Contractor shall be required to compare the compressive strength test results obtained in Section 601.4.4, for Class H concrete, to the compressive strength of the approved test mix per Section 601.3.

DELETE THE FIRST SENTENCE OF THE SECOND PARAGRAPH AND REPLACE WITH THE FOLLOWING:

The Contractor shall also be required to fabricate six rapid chloride permeability test specimens in accordance with AASHTO T277 every time that a set of compressive strength specimens for Class H concrete is fabricated.

601.10.1.1-Pre-Pour Meeting:

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

601.10.1.1-Pre-Pour Meeting: On projects for which the concrete is being used in bridge construction, the Contractor shall schedule a meeting prior to the start of the concrete work. The Engineer, Construction Manager, Prime Contractor, Concrete Contractor, Concrete Finisher, Concrete Supplier, and the Individual or Agency that will perform the quality control testing of the concrete shall attend. Topics of discussion shall include concrete mixture proportions, batching, transporting, handling, placing, finishing, curing, and on-site quality control testing requirements.

601.10.1.2-Concrete Placement Limitations:

DELETE THE FIRST SENTENCE AND REPLACE WITH THE FOLLOWING:

Immediately prior to, and during, placement of Class H concrete, if the evaporation rate exceeds 0.10 lb./sq. ft. per hour (0.5 kg/sq. m per hour) (see Figure 1), the Contractor shall make provisions (i.e. wind breaks, fogging, etc.) to reduce the rate prior to placing concrete.

601.10.1.4-Concrete Placement at Night

RE-NUMBER THE SECTION 601.10.1.4 TO SECTION 601.10.1.3. THE REVISED SECTION HEADING SHALL READ AS FOLLOWS:

601.10.1.3-Concrete Placement at Night:

601.12.4-Curing Class H Concrete

DELETE THE SECOND PARAGRAPH AND REPLACE WITH THE FOLLOWING:

The concrete surface shall be completely covered with clean, wet burlap. The burlap shall be thoroughly saturated over its entire area, but shall be drained of excess water before application. Burlap shall be lapped a minimum of one foot (305 mm) and shall lay flat. Failure to apply wet burlap within 30 minutes after discharge of the concrete from the truck and within 10 minutes of the completion of finishing operations shall be cause for rejection of the work as determined by the Engineer. Care shall be exercised to ensure that the burlap is well drained. Burlap shall be continuously wet for a period of seven days by means of automatic intermittent sprinkling or a continuous wetting system.

**SECTION 602
REINFORCING STEEL**

602.6-PLACING AND FASTENING:

602.6.1-General:

INSERT THE FOLLOWING AS PARAGRAPH TWO:

The clear distance between the reinforcing steel and the face of the concrete unless otherwise shown in the plans shall be:

Top of deck slab:	2.5”
Bottom of deck slab:	1.0”
Bottom of footings	3.0”
All other locations	2.0”

602.7-BAR SPLICES:

602.7.1-Lapping:

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

602.7.1-Lapping: All reinforcement shall be furnished in full lengths as indicated on the Plans. No splicing of bars, except where shown on the Plans, will be permitted without the written approval of the Engineer. Lapped splices shall be well distributed or located at points of low tensile stress. The bars shall be rigidly clamped or wired at all splices in a manner approved by the Engineer. Minimum lengths of lap splices unless otherwise noted shall be:

#4 Bar	1'-9"
#5 Bar	2'-2"
#6 Bar	2'-9"
#7 Bar	3'-9"
#8 Bar	4'-11"
#9 Bar	6'-2"
#10 Bar	7'-10"
#11 Bar	9'-7"

For epoxy coated bars, the minimum lap splice length shall be increased by 50 percent at locations where concrete cover is less than 3 bar diameters and 20 percent at all other locations.

**SECTION 603
PRESTRESSED CONCRETE MEMBERS**

603.15-PAY ITEMS

DELETE THE FOLLOWING ITEMS FROM THE TABLE:

ITEM	DESCRIPTION	UNIT
603027-*	Precast Reinforced Concrete Three-Sided Structure	Linear Feet (Meter)
603028-*	Precast Reinforced Concrete Wingwall	Linear Feet (Meter)
603029-*	Precast Reinforced Concrete Headwall	Square Feet (Meter)

**SECTION 610
PLAIN CONCRETE CURBING, INTEGRAL CONCRETE
CURBING, AND COMBINATION CONCRETE CURB AND
GUTTER**

610.3.4-Sections:

DELETE THE THIRD SENTENCE OF PARAGRAPH ONE AND REPLACE WITH THE FOLLOWING:

Sections shall be separated by joints 1/8 in. (3mm) wide except at expansion joints.

**SECTION 626
RETAINING WALL SYSTEMS**

DELETE THE SECOND PARAGRAPH AND REPLACE WITH THE FOLLOWING:

626.5-MATERIALS:

626.5.1.1.2.3- Sealers shall be silane and/or siloxane based and specifically formulated for use on porous surfaces such as concrete block.

Sealers shall be tested in accordance with ASTM E514 on a block wall, and shall provide a minimum of 90% reduction in leakage.

Three dry-cast concrete block specimens shall be treated with the sealer and tested for absorption in accordance with ASTM C140. The sealer shall provide a minimum of 90% reduction in water absorption when tested in this manner.

**SECTION 633
CONCRETE GUTTER, INVERT PIPE GUTTER, OR
DUMPED ROCK GUTTER**

633.2-MATERIALS:

ADD THE FOLLOWING TO THE TABLE

MATERIALS	SUBSECTION
CEMENT FOR GROUT	701.1 or 701.3
SAND FOR GROUT	702.1.1 through 702.1.5 and 702.2 or 702.6

633.6-DUMPED ROCK GUTTER:

ADD THE FOLLOWING TO THE SECTION:

633.6.1-Grout for Dumped Rock Gutter: Grout for Dump Rock Gutter shall be defined as per Section 633.2 with interstices filled with spalls and grouted cement grout. The grout filler shall be composed of a mixture of one part Portland Cement and three parts sand, mixed with water to produce a workable consistency. The amount of water shall be that designated by the Engineer. The stone shall be thoroughly wet immediately before grout is applied. As soon as the grout is deposited on the surface, it shall be thoroughly worked into the joints. The stones shall then be brushed so that their top surfaces are exposed.

Grouted Dump Rock Gutter shall be cured in accordance with any of the methods specified in 501.15, with a blanket of earth kept wet for 72 hours, or by sprinkling with a fine spray of water every two hours during the day-light hours for a period of three days.

633.7-METHOD OF MEASUREMENT

ADD THE FOLLOWING AS PARAGRAPH FOUR:

The quantity of work done for “Grouted Dump Rock Gutter” will be measured in cubic yards (meters), complete in place and accepted as determined by the dimensions as shown on the Plans or established by the Engineer. No excess thickness will be measured for pay quantity and no separate payment will be made for the cement grout.

633.9-PAY ITEMS:

ADD THE FOLLOWING TO THE TABLE:

ITEM	DESCRIPTION	UNIT
633004-001	GROUTED DUMP ROCK GUTTER	CUBIC YARDS (METERS)

**SECTION 636
MAINTAINING TRAFFIC**

636.5-TEMPORARY STRUCTURES:

DELETE THE CONTENTS OF THE SECTION AND REPLACE WITH THE FOLLOWING:

Temporary structures shall be constructed and maintained as shown on the Plans or as called for in the Proposal. The use of used material is acceptable; Such material shall be inspected visually and accepted by the Engineer prior to its use. The design and plans for the temporary structure shall be in accordance to Section 105.2.

ADD THE FOLLOWING SUBSECTION:

636.12-TEMPORARY IMPACT ATTENUATING DEVICE:

This device shall be a “stationary crash cushion” as described within Section F.82 of the manual “*Manual On Temporary Traffic Control For Streets And Highways, 2006 Edition*”.

The device utilized shall be a model listed on the WVDOH Approved Products Listing (APL) for Safety Devices specifically noted as being approved for temporary work zone use. Specific device selection in regards to manufacturer and model shall be at the Contractor’s discretion; however, unless the characteristics of the obstacle to be shielded dictate otherwise, the device utilized shall be a non-tapered, non-gating device. If it is not possible, based on the width of the obstacle to be shielded, to utilize a non-tapered, non-gating device, the Contractor shall utilize an approved Sand Barrel system.

Notes included on the APL characterize non-gating devices by their National Cooperative Highway Research Program Report 350 (NCHRP-350) crash testing approval level (Test Level 2 or Test Level 3). The Test Level certification required for each particular device to be qualified at shall be based on the normal (non work zone) posted speed limit in effect at the location of the device. A Test Level 2 or Test Level 3 device shall be utilized if the normal posted speed limit is 40 MPH or less. Otherwise, a Test Level 3 device shall be required. Sand Barrel arrays shall be designed for an impact speed 5 MPH greater than the normal posted speed limit.

All Temporary Impact Attenuating Devices shall be installed and maintained fully in accordance with the specifications and recommendations of the device manufacturer. This shall include, but shall not be limited to, characteristics of the roadway profile along the approach to the nose of the device and along the adjacent (traffic) side of the device, changes in the roadway grade within the length of the device, side slope and changes in the side slope at the location of the device, anchoring (base to be anchored to as well as the anchoring system), backup, attachment to the obstacle being shielded, transitioning to the obstacle being shielded, winterization, delineation, repair, and cleaning. If the installation requires deviations from the specifications and recommendations of the device manufacturer, the Contractor shall obtain written approval from the device manufacturer and shall produce this written approval for review upon request.

Impacted devices shall be maintained and returned to full impact capacity in a timely manner. Beginning 12 hours from the time and date upon which the Contractor is given documented notice of damage to a Impact Attenuating Device requiring repairs, the Contractor shall be subject to a penalty of \$1,000 per Calendar Day (24 hrs), or fraction thereof, until the necessary repairs are completed. This penalty shall not be temporarily suspended for any reason and shall apply regardless of the cause of the damage to the device.

All labor, equipment, and materials required for the repair of impact attenuating devices shall be incidental to Bid Item 636060.

636.14-TEMPORARY CONCRETE BARRIER:

DELETE THIS ENTIRE SECTION AND TITLE AND REPLACE WITH THE FOLLOWING:

636.14-TEMPORARY BARRIER:

Furnish, install, maintain, remove and dispose of temporary barrier in accordance with this specification and the contract plans.

636.14.1-Materials: Temporary Barrier shall meet the requirements of NCHRP Report 350 and/or MASH-08 for the different test levels as shown in Table 3.1 “Test Matrix for Longitudinal Barriers” in NCHRP Report 350. Specific types of temporary barrier will not be used unless crash tested and

approved by the Engineer. Historical performance will help determine use of a product. Poor performance may be grounds for non-acceptance.

Based on past performance, existing temporary concrete barrier with pin and eye connections are considered acceptable up to and including test level TL-3, until January 1, 2016

Temporary Barriers shall have adequate drainage slots to allow runoff to pass through.

Temporary Barrier shall have 8" x 12" Type B-1 Delineators (white or yellow as appropriate) facing traffic at 40 foot centers.

636.14.2-Installation: This barrier type shall conform to the details on the Plans, set as directed on the Plans, with the barrier sections securely connected together by satisfactory fastening devices to provide a more stable structure against impact.

A Temporary Barrier Installation Plan shall be approved according to Section 105.2.1.2 "Contractor Approval Method". It shall have information adequate to ensure it meets the installation conditions below and shall include barrier type, barrier connection type, NCHRP test approval and data, individual segment length, anchorage details, end treatments, and transition details.

The temporary barrier shall be placed to match test conditions as determined by the Engineer. These conditions may include, but not be limited to, anchorages, total length of barrier, individual segment length and connection details. Only one type of temporary barrier shall be used for any one continuous run of barrier in a project. To clarify, the entire length of temporary barrier shall not be intermixed in regard to type of barrier, connection type, or individual barrier length unless that configuration has been tested.

Anchorage spacing and installation, if required, shall be per manufacturer subject to shop drawing review and approval and meet or exceed test conditions. Shop drawing information shall include details for anchor removal and patching and /or repair of pavement or bridge deck.

Where temporary barrier adjoins guardrail barrier, regardless if one is temporary and the other is permanent (newly constructed or previously in existence) or if both are temporary, they must be connected with a Temporary Guardrail Connector conforming to 636.16.2.

Where temporary barrier adjoins bridge parapet or other essentially non-yielding barrier or obstacle, they must be joined in a manner to maintain barrier continuity and prevent vehicle snagging during impact. If they cannot be joined in this manner, a connection device must be used to assure barrier continuity and to prevent vehicle snagging during impact.

When the temporary barriers are no longer needed, they will become the property of the Contractor, unless otherwise noted on the Plans.

J-J Hook connections shall be tensioned by pulling the barrier segments apart to make this type connection "tight".

Vehicles, materials or any other equipment shall not be stored in the Temporary Barrier buffer area. Unless required as a part of the contract, vehicles and equipment shall not work in the Temporary Barrier buffer area and if required, shall be limited to that time that it is necessary to be in that area.

636.15-REMOVING AND RESETTING TEMPORARY CONCRETE BARRIERS:

DELETE THIS ENTIRE SECTION AND REPLACE WITH THE FOLLOWING:

636.15-REMOVING AND RESETTING TEMPORARY BARRIERS:

Temporary barriers that are to be relocated within a project shall be salvaged and reinstalled as specified in 636.14 and set as indicated on the Plans.

636.23-METHOD OF MEASUREMENT:

636.23.4-Temporary Structures:

DELETE THE CONTENTS OF THE SUBSECTION AND REPLACE WITH THE FOLLOWING:

"Temporary Structures for Maintaining Traffic", as detailed on the Plans or called for by the Engineer, shall be on a lump sum basis for completing, maintaining and removal of the work. Earthwork required for erection or removal of the structure, not measured and paid for by a specific item, shall not be measured or paid for and shall be incidental to Item 636005-*, Temporary Structure For Maintaining Traffic.

636.23.17-TEMPORARY CONCRETE BARRIER:

DELETE THE HEADING CONTENTS. REPLACE WITH THE FOLLOWING:

636.23.17-Temporary Barrier: The quantity of "Temporary Barrier" shall be the linear feet (meters) of barrier actually placed. Payment shall include terminal connecting devices, delineators, anchoring, maintaining, dismantling, removal and disposal of the barrier and devices when no further use is required.

636.23.18-Removing and Resetting Temporary Concrete Barrier:

DELETE THE SECTION AND REPLACE WITH THE FOLLOWING:

636.23.18-Removing and Resetting Temporary Barrier: The quantity of “Removing and Resetting Temporary Barrier” shall be the linear feet (meters) of barrier reused in a different location. Payment shall include temporary storage if necessary, re-erecting, maintaining, dismantling, removal and disposal of the barrier.

ADD THE FOLLOWING SUBSECTION:

636.23.27-Temporary Impact Attenuating Device: One unit of “Temporary Impact Attenuating Device” shall be paid at the time of initial installation of a device, as described in Section 636.12, at each unique location within the project. However, over the life of the project the Contractor shall not be paid for a quantity of this item exceeding the maximum number of individual devices required to be in place on the project at a specific time. Each installation beyond this quantity shall be paid for using the “Remove And Reset Attenuator Device” item.

ADD THE FOLLOWING SUBSECTION:

636.23.28-Remove and Reset Attenuator Device: This item shall be measured and paid for in accordance with the provisions of Section 636.23.27.

636.25-PAY ITEMS:

ADD THE FOLLOWING ITEMS TO THE TABLE:

Item Number	Description	Unit
636017-*	Temporary Barrier, TL-1, **	Linear Foot (LF) Meter (M)
636017-*	Temporary Barrier, TL-2, **	Linear Foot (LF) Meter (M)
636017-*	Temporary Barrier, TL-3, **	Linear Foot (LF) Meter (M)
636017-*	Temporary Barrier, TL-4, **	Linear Foot (LF) Meter (M)
636017-*	Temporary Barrier, TL-5, **	Linear Foot (LF) Meter (M)
636018-*	Remove and Reset Temporary Barrier	Linear Foot (LF) Meter (M)
636060-*	Temporary Impact Attenuating Device	EA
636060-*	Remove and Reset Attenuator Device	EA

* Sequence number

** Deflection range (see below)

Example: “636017 Temporary Barrier TL-3, IV ”

DEFLECTION RANGES:

Supplemental Description	Deflection Criteria
I	Minimal Deflection < 6 in.
II	Low Deflection < 24 in.
III	Medium Deflection < 60 in.
IV	High Deflection < 96 in.

Deflection values are based on NCHRP testing for corresponding level and is permanent deflection measured at the bottom of the barrier.

**SECTION 638
PROJECT MARKERS, RIGHT-OF-WAY MARKERS,
AND SURVEY MARKERS**

DELETE THE HEADING AND REPLACE WITH THE FOLLOWING:

**SECTION 638
PROJECT MARKERS, RIGHT-OF-WAY MARKERS,
SURVEY MARKERS, AND OUTLET MARKERS**

638.1-DESCRIPTION:

DELETE THE FIRST PARAGRAPH AND REPLACE WITH THE FOLLOWING:

This work shall consist of furnishing, and placing or installing at the points designated on the Plans, in the Contractor's Proposal or by the Engineer, metal (signpost) project markers, right-of-way markers, concrete survey markers, and outlet markers in accordance with these Specifications and in reasonably close conformity to the lines, grades, dimensions, locations, and sections shown on the Plans, in the Contractor's Proposal or established by the Engineer.

638.2-MATERIALS:

ADD THE FOLLOWING AS THE THIRD PARAGRAPH:

The materials for Outlet Marker Signs, such as for the sign panels, their supports, and for the legend and background, are to be of a type and method of fabrication that will be consistent with the conditions and estimated period of use. Signs shall have black letters for the legend on a white background. Reflective sheeting will be permitted, but not required.

638.6.3-Installation: Mounting, transverse location, and similar features for Outlet Marker Signs shall be consistent with practices used for the installation in 636.9 on wooden or steel U-channel supports to comply with small sign support safety practices. The sign shall be mounted as directed by the Engineer.

638.7-METHOD OF MEASUREMENT:

The quantity of work done will be the actual number of "Project Markers", "Right-of-Way Markers", "Survey Markers" or "Outlet Markers", complete in place and accepted.

638.8-BASIS OF PAYMENT:

The quantities, determined as provided above, will be paid for at the contract unit prices bid for the items listed below, which prices and payments shall be full compensation for excavating, backfilling, disposing of surplus material, furnishing all the material and doing all the work prescribed in a workmanlike and acceptable manner, including all labor, tools, equipment, supplies, and incidentals necessary to complete the work.

638.9-PAY ITEMS:

ADD THE FOLLOWING TO THE TABLE:

ITEM	DESCRIPTION	UNIT
638004-*	OUTLET MARKER	EACH

*Sequence number

**SECTION 657
ROADSIDE SIGN SUPPORTS**

657.2-MATERIALS:

ADD THE FOLLOWING SECTION.

657.2.5-U-channel Breakaway Mounting Device: When specified to be used in the project plans, this device shall be used in order to enable either 2# per foot or 3# per foot flanged "U-channel" to be installed into an anchor, which shall be imbedded in an existing asphalt or concrete surface. The device shall be designed as described in Materials Section 709.51.

657.4.2-Setting Posts:

REPLACE THE FORTH PARAGRAPH WITH THE FOLLOWING.

When posts are to be located in existing concrete such as dividers or islands, the concrete shall be carefully opened by drilling or other suitable

methods. The post shall then be placed to the required depth of embedment and backfilled with base course material to a point approximately 2 inches (50 mm) from the top of a liquid, rubberized asphalt compound in accordance with 708.3. Alternatively, if specified to be used in the project plans on either existing concrete or asphalt surfaces, the supports shall be installed using U-channel Breakaway Mounting Device shall be installed as specified by the device manufacturer.

ADD THE FOLLOWING SECTION.

657.5.12-U-channel Breakaway Mounting Device: Any U-channel Breakaway Mounting Devices specified to be installed in the project plans shall be paid incidental to either bid item 657008-001-2.00 LB CHANNEL POST, or bid item 657010-001-3.00 LB CHANNEL POST, as applicable. This shall include all labor, materials, equipment, or other incidental expenses associated with the installation of the devices.

SECTION 660 TRAFFIC SIGNALS

ADD THE FOLLOWING.

660.9-LOOP TRAFFIC DETECTORS:

The Contractor shall be responsible for replacement of damaged loops and lead-in cable to the existing splice box or otherwise designated junction box.

The Contractor shall be responsible for replacing all damaged traffic signal loops within the construction limits within fourteen (14) calendar days of when damage occurs.

Standard (6 foot x 6 foot) detector loops shall consist of three (3) turns of stranded #14 AWG copper wire, with Quadrupole presence loops consisting of two (2) turns of stranded #14 AWG copper wire meeting IMSA conductor specifications. All detector loops shall conform to WVDOH Standard Specifications 715.42.2 and 715.42.13.

ADD THE FOLLOWING.

660.15-JUNCTION BOXES:

The Contractor shall be responsible for reconstruction and/or replacement of all damaged junction boxes. Damage junction boxes shall be defined as any junction box more than two (2) inches below grade, or is covered by the area roadway surface.

The adjustment of the junction box shall include the complete excavation and shall conform to WVDOH Standards Specifications, Section 660.8 and 660.15. All conduit, cable and attached appurtenances shall be incidental to this junction box.

The adjustment of the junction box shall be as per detail and shall conform to WVDOH Standards and Specifications Section 660.8 and 660.15.

660.21-PAY ITEMS:

ITEM	DESCRIPTION	UNIT
660005-*	ADJUST JUNCTION BOX, BOX NUMBER "number"	Each
660007-*	MISCELLANEOUS SIGNAL LOOP NUMBER "number"	Lump Sum

Sequence Number

**SECTION 661
TRAFFIC SIGNS AND DELINEATORS**

661.3.7.1-Flat Sheet:

DELETE ENTIRE SUB-SECTION AND REPLACE WITH THE FOLLOWING:

Flat sheet signs shall be fabricated of a single piece of sheet material without joints. The height or width of the sign shall be within plus or minus 5/8 inch (3 mm) tolerance of the dimensions indicated on the Plans. Corner radii shall be within plus or minus 1/16 inch (1.6 mm) tolerance of the dimensions shown on the Plans.

Panels shall have dimensions and corner radii in accordance with the Standard Details and shall be punched only with the holes necessary for proper mounting. Signs shall be free of buckles, warp, dents, and burrs prior to the application of reflective sheeting or other background material. Dimples or indentations shall not be noticeable from a distance of 10 feet (3 m) normal to the sign.

661.17-PAY ITEMS:

DELETE THE FOLLOWING FROM THE TABLE:

ITEM NUMBER	DESCRIPTION	UNIT
661001-002	0.100 IN FLAT SHEET SIGN	SF

SECTION 662 ROADWAY LIGHTING

ADD THE FOLLOWING.

662.14-TESTING:

The Contractor shall inspect and certify to the replacement of all damaged traffic signal loop conductors and to the proper functioning of the traffic signal, and that the junction boxes within the project limits comply with section 660.15. The inspection shall be performed before project completion and after all the work has been completed in the area of the traffic signal system and related components.

The Electrical Inspection shall be paid as item 662015-*, Electrical Test, per Lump Sum.

SECTION 664 TRAFFIC SAFETY DEVICES

664.3-CONSTRUCTION METHODS:

ADD THE FOLLOWING TO THE SECTION:

664.3.2-Rumble Strips: This work consists of furnishing a machine capable of cutting or milling rumble strips on the centerline or edge of roadways in accordance with the details and notes on the plans and as directed by the Engineer.

The Contractor shall pre-mark the location of the center of each cut, and the beginning and ending points of the sections, prior to the installation of the Rumble Strips. The Engineer shall review and approve the locations.

Rumble Strips shall not be installed on bridge decks, loop detector saw-cut locations, structures, approach slabs or in other areas identified by the Engineer.

The method and equipment for constructing ground-in indentations shall be selected by the Contractor and shall meet the requirements of 664.3.2.1.

Rumble Strips shall be constructed within two (2) inches of the required alignment.

Indentations shall not vary from the dimensions shown on the plans by more than 0.10 inch in depth and five percent (5%) in width.

Finished Rumble Strips not meeting the specified tolerances shall be brought within tolerance by either abrasive grinding, or removal and replacement. The corrective method will be selected by the Engineer. Ground surface areas shall be neat and uniform in appearance. The corrective work shall be at the Contractor's expense.

All removed material shall become the property of the Contractor and disposed of in conformance with provisions in Section 415, “Removing Existing Pavement Surface” of the Standard Specifications or as approved by the Engineer.

664.3.2.1-Rumble Strip Equipment: The machine shall consist of a rotary type cutting head with a maximum outside diameter of 12 (twelve) inches (305mm). The cutting tool shall have the cutting head(s) arranged in such a pattern as to provide a relatively smooth cut per milled section without tearing or snagging and be equipped with guides to provide uniformity and consistency in alignment of each cut with respect to the roadway. The strips shall be cut in accordance with the dimensions as detailed on the Plans, and materials resulting from cutting the pavement shall be disposed of and the slots shall be properly cleaned.

664.4-METHOD OF MEASUREMENT:

ADD THE FOLLOWING TO THE SECTION:

664.4.2-Rumble Strips: This work shall be measured for payment by the actual linear feet of rumble strips placed and accepted, without regard to the width of the strip. This distance shall be measured longitudinally along the centerline of pavement with deductions for bridge decks, drainage structures, raised pavement markers, loop detector saw-cut locations, and any other sections where Rumble Strips were not installed.

664.5-BASIS OF PAYMENT

ADD THE FOLLOWING PARAGRAPH TO THE SECTION:

The Contract unit price per foot for Rumble Strips will be paid for the pay items listed in Section 664.6. The price shall include furnishing all equipment, tools, labor, and work incidental thereto and also disposal of any waste material resulting from this operation.

664.6-PAY ITEMS

ADD THE FOLLOWING TO THE TABLE:

ITEM NUMBER	DESCRIPTION	UNIT
664002-001	Edge Line Rumble Strip, Asphalt Pavement	LF (Meter)
664002-002	Edge Line Rumble Strip, Concrete Pavement	LF (Meter)
664003-001	Centerline Rumble Strip, Asphalt Pavement	LF (Meter)
664003-002	Centerline Rumble Strip, Concrete Pavement	LF (Meter)
664004-001	Rumble Strip, ADAB	LF (Meter)

**SECTION 679
OVERLAYING OF PORTLAND CEMENT CONCRETE
BRIDGE DECKS**

679.3-CONSTRUCTION METHODS:

679.3.1.1-Removal of Existing Deck Surface Phase I:

**DELETE PARAGRAPH THREE AND REPLACE WITH THE
FOLLOWING:**

When full depth removal of material is necessary, the forming shall be incidental to the cost of the concrete deck overlay.

679.3.1.2-Removal of Existing Deck Surface Phase II:

**DELETE PARAGRAPH THREE AND REPLACE WITH THE
FOLLOWING:**

When full depth removal of material is necessary, the forming shall be incidental to the cost of the concrete deck overlay.

679.6-METHOD OF MEASUREMENT:

679.6.2.2:

**DELETE PARAGRAPH TWO AND REPLACE WITH THE
FOLLOWING:**

When full depth removal of material is necessary, the forming shall be incidental to the cost of the concrete deck overlay.

DIVISION 700 MATERIALS DETAILS

SECTION 709 METALS

ADD THE FOLLOWING SECTION.

709.51-U-CHANNEL BREAKAWAY MOUNTING DEVICES:

709.51.1-General Description and Requirements: The device shall be NCHRP-350 approved up to Test Level III for use with 2# per foot and 3# per foot-u-channel supports on installations with up to three (3) supports in a seven (7) foot lateral width. The device shall be designed to withstand cyclic loading (allowing for bending beyond 12%), yet break away safely on impact. The device shall be designed to not fail due to wind loading prior to failure of the sign support.

709.51.2-General Design and Functionality: The objective of the device shall be to ensure a signpost with release from an anchor upon impact from a motor vehicle. The device shall include a driven subgrade anchor, a receiver for the channel support, and a breakaway coupling connecting the receiver to the anchor,

Vehicle damage shall be minimized, as shall the risk to pedestrians after the post has been impacted. As a minimum, the device shall incorporate the following features:

1. The breakaway coupler shall be designed to shear or yield at any angle of incidence (360) degrees), with a constant amount of force, irrespective of vehicle velocity.
2. The breakaway coupler shall function effectively and independent of the sequence in which the fasteners are tightened. The sole function of the fasteners shall be to secure the sign post to the receiver and the coupler to the subgrade anchor. The receiver for the sign support shall be integral to the upper end of the coupler, eliminating the need for connection hardware.
3. Upon impact, no shards of metal shall be left above the top of the subgrade anchor, which shall be designed to be driven to grade. The anchor shall be automatically plugged to prevent any foreign matter or debris from entering, and to ensure protection from a pedestrian trip or fall accident.

4. No special tools such as torque wrenches or the like shall be required for effective installation or replacement of the receiver and breakaway coupler.
5. The receiver and breakaway coupler design shall enable the sign installer to fully reattach a signpost to the anchor within a five-minute period after a knock down.
6. When damaged by a direct wheel impact or vehicle under carriage, the design of the breakaway coupler shall facilitate reuse of the anchor.

709.51.3-Individual Component Features:

709.51.3.1-Breakaway Coupler: The breakaway coupler shall incorporate a hollow biconical or other similarly shaped shear section facilitating reliable true 360 degree functionality and enabling the post and receiver to separate cleanly from the anchor. To prevent trip or fall hazards, the coupler shall break cleanly and reliably at grade without leaving any sharp pieces of metal above grade. The coupler material shall provide for a minimum bending (elongation) of 12% prior to fracture. Upon impact the anchor shall remain undamaged with the inside of the anchor plugged by the remaining portion of the coupler. The bottom end of the coupler shall attach to the anchor by slidably fitting inside with the breakaway portion of the coupler being slightly above the anchor. The coupler shall incorporate a locking feature which applies equal and opposite force directly to a minimum of two opposing side walls of the anchor through the tightening of one externally accessible fastener prior to or after installation of the sign support.

709.51.3.2-Anchor: The breakaway coupler shall attach to a square 2½ “ x 2½” (min.) heavy duty anchor. The length of the anchor shall be 8” min. for concrete applications and 12” min. for asphalt applications. The anchor shall incorporate a tab completely around the top end such that the tab will sit flush on the road surface when completely driven, and will aid to seal the pre-driven hole from moisture and debris.

The anchor may be designed to allow a square 2”x2” ¼ “ wall (min.), 80 KSI min. yield strength seamless extension to slide into the end in order to meet the 12” length requirement in asphalt. The anchor a minimum of 4”. The anchor shall use a taper lock feature which is designed to ensure the joining of the anchor and the extension.

The anchor shall incorporate a inside plug or barrier, below the designed elevation of the bottom of the coupler after being inserted, to prevent moisture or soil from the bottom of the anchor to come into contact with the coupler.

701.51.3.3-Receiver: The receiver for the sign support shall be cast, and shall facilitate a snug male (sign support) to female (receiver) connection. The support shall be securely fastened to the receiver through the use of a maximum of two fasteners.

709.51.4-Component Materials and Coatings: The coupler and receiver components of the device shall be manufactured using material meeting the requirements of ASTM A536 (65-45-12 min). These components shall be coating with an exterior grade (UV protected) powder coating.

The subgrade anchor shall be manufactured from steel meeting the requirements of ASTM C1018. The entire anchor shall be covered with a rust inhibiting exterior grade epoxy coating.

SECTION 714 CONCRETE, CLAY, FIBER AND PLASTIC PIPE

714.23-PRECAST REINFORCED CONCRETE BOX CULVERTS:

ADD THE FOLLOWING AT THE END OF THE SECTION:

All box culverts shall be cured in accordance with section 601.12 except that curing may be discontinued once 70% of the design strength is achieved.

SECTION 715 MISCELLANEOUS MATERIALS

715.8-WATERPROOFING FABRIC:

DELETE THE ENTIRE CONTENTS AND REPLACE THE FOLLOWING.

The material shall conform to the requirements of ASTM D173.

ADD THE FOLLOWING SECTION(S) TO THE SECTION:

715.10-PREFABRICATED DRAINAGE SYSTEMS:

715.10.1-Prefabricated Pavement Edge Drain:

715.10.1.1-General: Prefabricated pavement edge drain shall be a flexible rectangular hollow mat consisting of a supporting polymeric drainage core encased in an engineering fabric envelope and having sufficient flexibility to withstand installation bending and handling without damage.

715.10.1.2-Core: The drainage core shall be constructed from a polymeric material, have a minimum thickness of $\frac{3}{4}$ inch (19 mm) and a minimum compressive strength of 3,000 pounds per square foot (145 kPa) with a maximum deflection of 20 percent determined by ASTM D 1621, except the sample size may be increased to a maximum of 12 in. by 12 in. (300 mm by 300 mm) The edge drain shall permit inflow on both sides of

the drain and produce a minimum flow rate of 10 gal/minute/ft (123 liters/minute/meter) of width as determined by ASTM D 4716. Flow rates shall be based on a hydraulic gradient of 0.1 and a confining pressure of 10 psi (69 kPa) using a closed-cell foam rubber layer on both sides. The height of the edge drain shall be as shown on the Plans.

715.10.1.3-Fabric: The fabric shall be suitable for subsurface drainage applications and shall meet the requirements of 715.11 except the minimum tensile strength shall be 90 lbs. (400 N). The fabric shall be bonded to or stretched tightly over the core support contact points.

715.10.1.4-Fittings: All fittings shall be in accordance with the manufacturer's published specifications.

715.10.1.5-Outlet Pipe: The outlet pipe shall be a smooth inner wall unperforated pipe meeting the requirements of 714.19 (AASHTO M252, Type S only) or 714.22

715.10.1.6-Acceptance: All components of the edge drain shall be approved before use. The Contractor shall furnish certified test data with the material supplied for each project. Tests for all required properties shall be performed in accordance with the procedures specified. Compliance of this data with the requirements specified will be the basis of acceptance.

715.11-ENGINEERING FABRIC:

715.11.1-General: Engineering fabric shall meet the applicable requirements of AASHTO M 288.

715.11.2-Acceptance: All engineering fabric shall be approved before use. When using a fabric not on the Division's approved list, the Contractor shall furnish certified test data with each shipment of fabric. Compliance of this data with the requirements of the specific application will be the basis of acceptance.

The test results submitted shall be derived from testing samples representing the fabric contained in each shipment. Tests for all required properties shall be performed in accordance with the procedures specified. Each roll shipped shall be identified so as to show its relationship to the test data submitted.

715.11.3-Maintenance and Repairs: Any fabric damaged or displaced shall be replaced or repaired at the Contractor's expense. Any fabric, other than that used for silt fence, not covered within 14 days after installation shall be removed and replaced at no expense to the Division. Minor tears or

ruptures in the fabric may be repaired by sewing or by placing another piece of fabric over the damaged area so that the overlap is at least 2 feet (600 mm) in each direction or as directed by the Engineer.

715.11.4-Engineering Fabric For Subsurface Drainage: Engineering fabric for subsurface drainage shall meet the applicable requirements of AASHTO M 288, Section 7, Class 2. Additionally, the permittivity shall be a minimum of 0.2 sec^{-1} and the apparent opening size shall be no larger than No. 60 (250 μm) sieve.

715.11.5-Engineering Fabric For Sediment Control (Silt Fence): Engineering fabric for sediment control shall meet the applicable requirements of AASHTO M 288, Section 8.

715.11.6-Engineering Fabric For Erosion Control: Engineering fabric for erosion control shall meet the applicable requirements of AASHTO M 288, Section 7, Class 1.

715.11.7-Engineering Fabric For Paving: Engineering fabric for paving shall meet the applicable requirements of AASHTO M 288, Section 9.

715.11.8-Engineering Fabric For Separation: Engineering fabric for separation shall meet the applicable requirements of AASHTO M 288, Section 7, Class 2.

715.11.9-Engineering Fabric For Stabilization: Engineering fabric for stabilization shall meet the applicable requirements of AASHTO M 288, Section 7, Class 1.

715.11.10-Engineering Fabric for Pumped Sediment and Erosion Control (Dewatering Device): Each standard Dewatering Device shall have a fill spout large enough to accommodate a 4 inch (100 mm) discharge hose with attached straps to secure the hose and prevent pumped water from escaping without being filtered. The device must be able to accommodate a minimum flow rate of 1000 gal per minute (4 546 liters per minute) for the application for which it is to be used and a minimum size of 100 square feet (9 square meters).

The Dewatering Device shall be a nonwoven bag, which is sewn with a double needle stitching using a high strength thread.

The Dewatering Device seams shall have an average wide width strength per ASTM D 4884 of 100 LB/IN (1.15 kg/meter).

The geotextile fabric shall be nonwoven fabric with the following properties:

PROPERTIES	TEST METHOD	ENGLISH	METRIC
Grab Tensile	ASTM D-4632	250 Lbs.	113 kg
Puncture	ASTM D-4833	165 Lbs.	75 kg
Flow Rate	ASTM D-4491	70 Gal/ Min/ Square Foot	25 liters/ Min/ Square meter
Permittivity	ASTM D-4491	1.3 Sec.-1	1.3 Sec.-1
Mullen Burst	ASTM D-3786	550 LBS. / square inch	3.79 MPa
UV Resistant	ASTM D-4355	70 %	70 %
AOS % Retained	ASTM D-4751	100 %	100 %

* All properties are minimum average roll value.

715.12-CONCRETE FOR MISCELLANEOUS USES:

Concrete specified in this Section is intended for such uses a cast-in-place footers for right-of-way fence and footers for guardrail breakaway cable terminals and special trailing end terminals. The concrete may be mixed with or without air entrainment at the option of the Contractor. Batching and mixing may be by hand, by portable mixer, or by a commercial plant. At the time of placement, the concrete shall be of a workable consistency which can be consolidated satisfactorily by spading or vibrating. Indications of initial set in the concrete to such an extent as to adversely affect the workability of the concrete during placement shall be cause for rejection. The concrete shall be in accordance with one of the following:

- i. Concrete produced for other construction items under an approved mix design.
- ii. Concrete produced from premixed ingredients sold commercially in acceptable sacks, such as "Sacrete", or "Quickrete", "Handicrete" or approved equal. Premixed commercial preparations shall be mixed in accordance with the manufacturer's instructions.
- iii. Concrete produced from separate components proportioned by volume in the ratio of one part Portland cement to two parts sand to three parts coarse aggregate. Sand and coarse aggregate shall be visually inspected for deleterious substances, and such matter shall be removed prior to mixing.

715.14-ELASTOMERIC BEARING PADS:

DELETE THE ENTIRE CONTENTS AND REPLACE THE FOLLOWING.

715.14-ELASTOMERIC BEARING PADS:

Bearing pads shall meet the requirements of the AASHTO Standard Specifications for Highway Bridges, except for sampling frequency.

715.14.1-Sampling Frequency For Elastomeric Bearing Pads: The sampling rate shall be one bearing pad per lot, per nominal dimensional size. (A change in nominal dimensional size is any change in the designed length, width or height of the bearing pad.)

715.41-TRAFFIC SAFETY DEVICES:

715.41.4-Quad Guard Impact Attenuating Device (Type VIII):

DELETE THE CONTENTS OF THE SUBSECTION AND REPLACE THE FOLLOWING.

The unit shall consist of crushable cartridges surrounded by a framework of steel Quad-beam guardrail which can telescope rearward during head-on impacts. The quad Guard System shall have a center monorail which will resist lateral movement during side angle impacts. The nose shall consist of a formed plastic or metal nose wrap.