PROJECT MARKER



PLAN

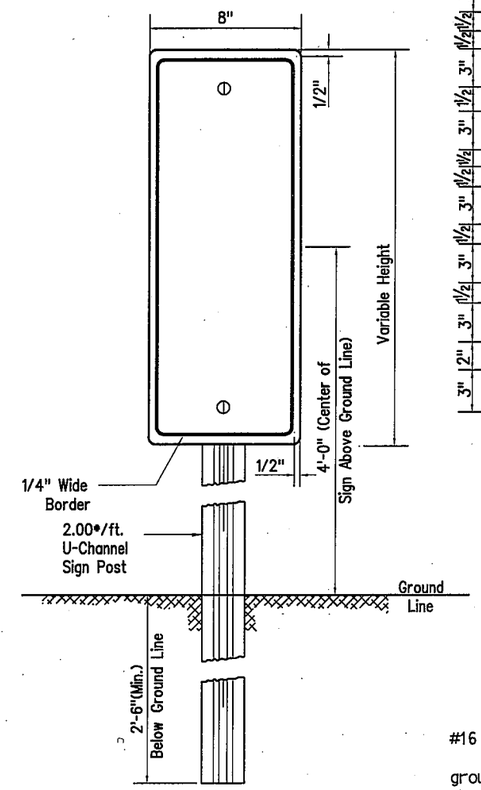

ELEVATION

Mounting Detail



U CHANNEL SIGN POST DETAIL

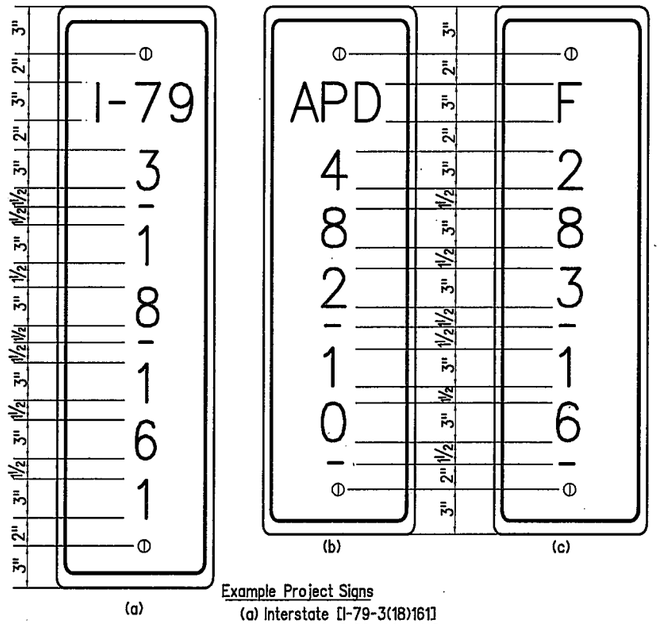

Example Project Signs
(a) Interstate [I-79-3(18)161]
(b) Appalachian[APD 482(10)]
(c) Federal[F-283(16)]

TYPICAL SIGNING DETAILS

NOTES

Signs shall be fabricated from 0.08" thick aluminum sheets or #16 gauge galvanized steel sheets. Reflectorization is not required.

Signs shall have black legends and borders on white backgrounds. The letters and numerals are to be of the size and style shown herein.

U-Channel posts shall meet the requrements of Section 657.2 of the Specifications.

Steel signs and posts shall be galvanized in accordance with ASTM A-123.

Steel hardware shall conform with Subsection 709.23 of the Specifications; aluminum hardware with Subsections 709.36 and 709.37. Steel hardware shall be galvanized in accordance with ASTM A-153.

Top of posts shall extend to the top of signs.

All posts and signs shall be punched with 3/8-inch holes on their vertical centerlines. Holes shall be so located that the signs can be attached to the posts at three inches below the top of the signs and three inches above the bottom of the signs.

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
STANDARD DETAIL

REVISED STANDARD DETAIL

PREPARED 7-1-99

REVISION DATE
9/13/10

MARKER

SHEET 1 of 2

SHEET M 1